

HUSKY 100 - TIMBER 280AL

Capacity:

- Maximum door weight: 100kg.
- Maximum door height: 2400mm.
- Door thickness: 20mm - 50mm.

Application:

This gear is suitable for timber door applications. The reliable and highly versatile gear is suitable for interior light commercial applications.

Kits:

Single door fittings pack (75) for timber doors up to 100kgs contains:

- Two acetal wheel hangers (284).
- Nylon guide (101N).
- Stop - inline track stop (287).
- Fixing instructions.

Components:


- Top Track - aluminium (280AL). Available in 1.25m, 1.5m, 2m, 2.5m, 3m, 4m and 4.5m.
- Bracket - Husky, face fix (281/5) - 5 brackets per pack.
- Bracket - Husky, face fix (281/8) - 8 brackets per pack.
- Hanger - Husky, 100kg, top-fix (284), timber application.
- Stop - inline track stop, (287).
- Guide - nylon, sawcut, (101N).
- Guide - metal, angle, sawcut, (124).
- Roller Guide - nylon, plate fixing (106RN/94).
- Roller Guide - brass, plate fixing (106R/94).
- Roller Guide - stainless, plate fixing (106RB/94).
- Guide channel - brass (94). Available in 1.6m, 2m, 2.5m, 3m and 3.2m lengths.
- Guide channel - aluminium (94X). Available in 1.6m, 2m, 2.5m, 3m and 3.2m lengths.
- Guide channel - polypropylene (94P). Available in 2m, 3m, 4m and 6m lengths.
- Guide channel - polypropylene with aluminium support (94PA). Available in 2m, 3m, 4m and 6m lengths.

Optional Extras:

- Flush Bolts.
- Flush Pulls.
- Locks - a wide variety of locking options are available within the Interlock range of products.

Please note:

- Refer to component section for component options and technical detail.

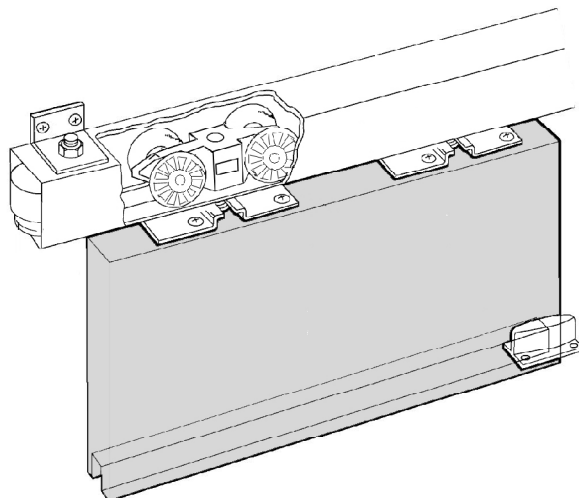

HUSKY 100 - TIMBER 280AL

INT



INTERLOCK
ASSA ABLOY

HUSKY 100 - TIMBER 280AL

