

SPRINT

Capacity:

- Maximum door weight: 30kg.
- Maximum door opening width: 1525mm.
- Door thickness: 32mm - 45mm.

Application:

Ideal for residential sliding doors. Suitable for use with flush, panelled or glazed framed timber doors.

Packset Components:

Standard packset kits for a single leaf door contain:

- Track (160A).
- Guides (101N).
- SP3T packset includes the non grooving guide (162).
- Hangers (161).
- Stops (163).
- Screws.
- Fixing instructions.

Optional Extras:


- Pelmet (164/165) - White coloured steel 1830mm long that clips directly on the track and end caps (165) snap fit onto the pelmet.
- Soffit fixing brackets - 3/40.

Packset Sizes:

- SP3 - Max. opening width 915mm for single door.
- SP3T - Max. opening width 915mm for single door.
- SP5 - Max. opening width 1525mm for single door.
- SP1 - Set of fittings without track.



Please note:

- Please refer to component section for component options and technical detail.



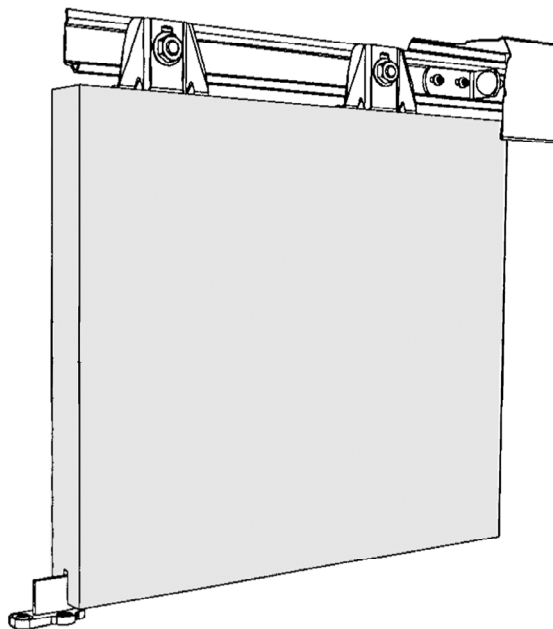


SPRINT



SPRINT

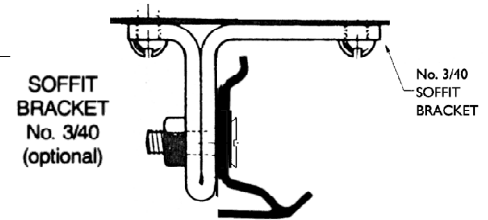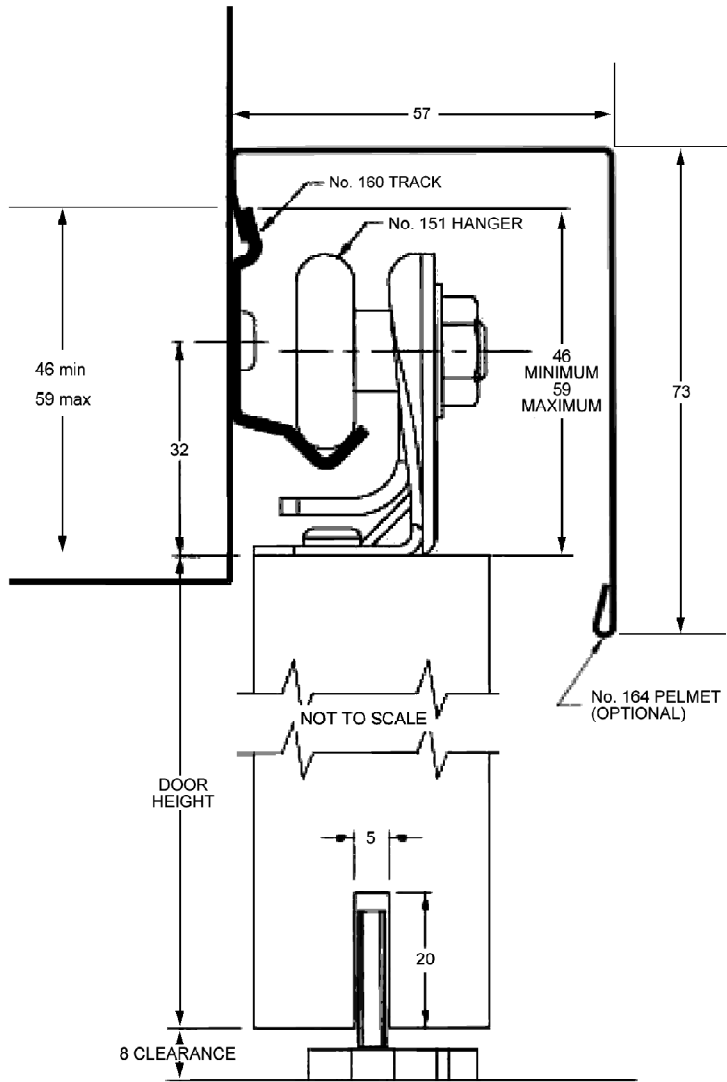

Max. recommended door weight using 3/40 soffit brackets 14kg (31lbs)
Fix door stop at floor.

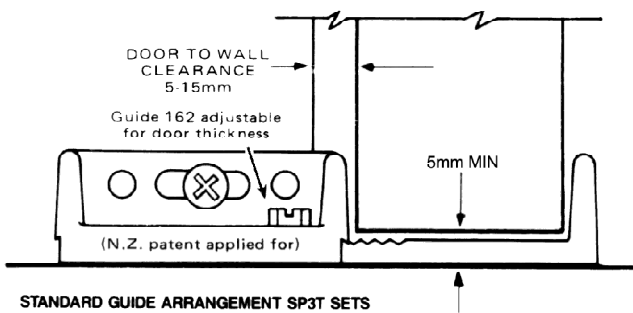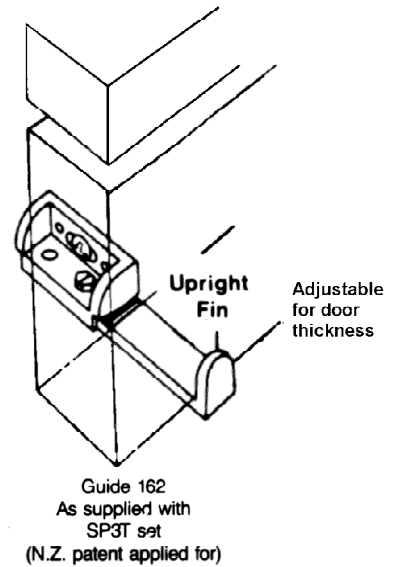

GUIDE 101N
As supplied with SP3E, SP3, SP5 and SP1 sets.

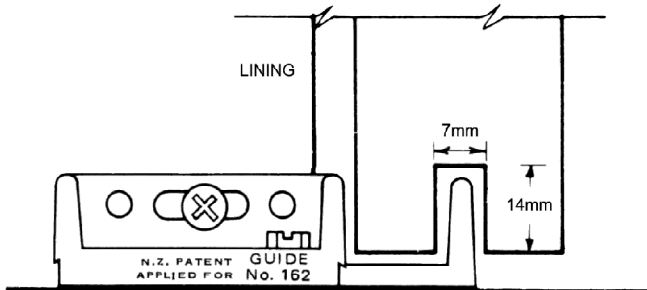

PLAN OF TYPICAL INSTALLATION.
FOR BI — PARTING INSTALLATIONS
USE TWO STANDARD SETS OR ONE
SP5 SET AND ONE SP1 SET FOR
710mm WIDE DOORS MAX.