




Concealed  
cam-action  
door closer system

# DORMA ITS 96



## Concealed cam-action door closer system DORMA ITS 96

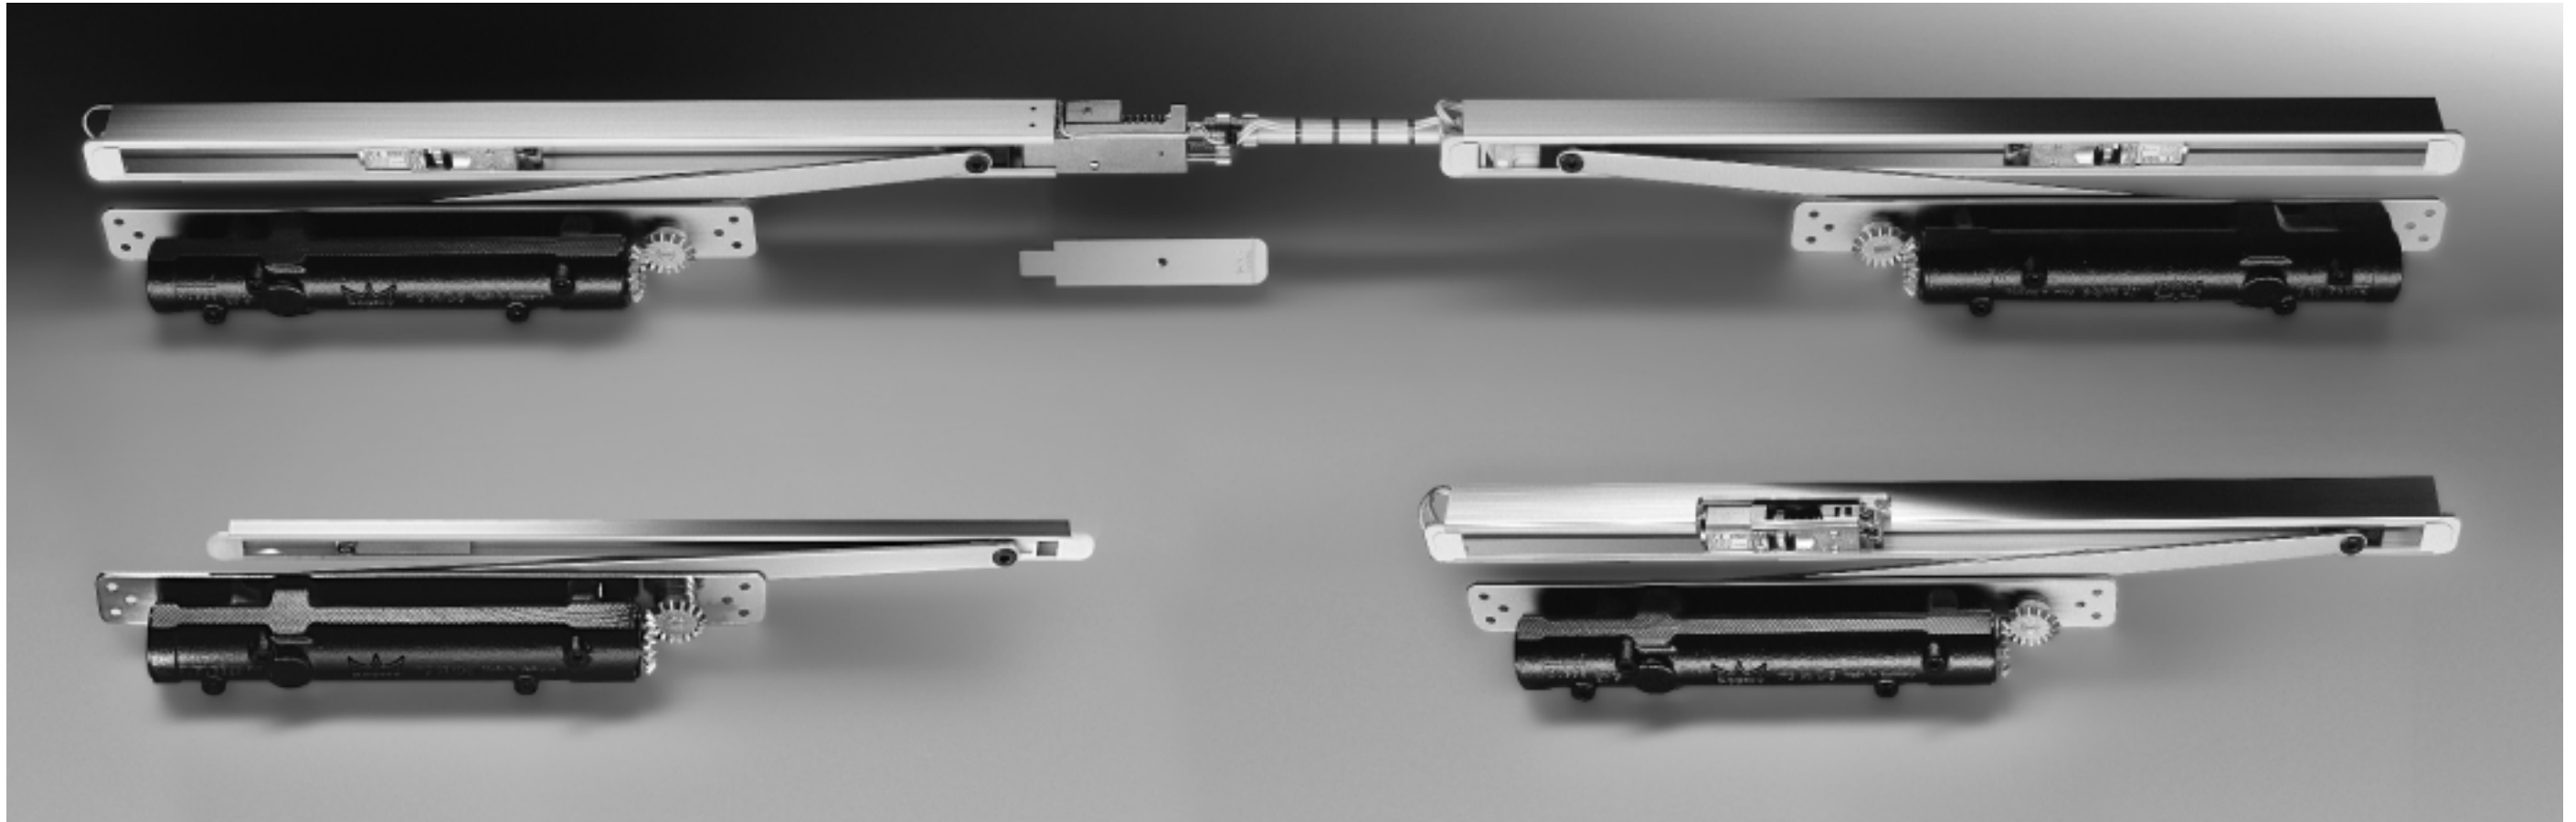

### Flawless beauty

To ensure that prestigious doors retain all their inherent attraction, they can now be fitted with a concealed cam-action door closer system – the DORMA ITS 96. This is the first system of its kind, one which can be integrated in the door leaf and frame with the utmost elegance. Where the emphasis is on appearance, the disappearing DORMA System ITS 96 is the ideal solution for your doors: Advanced technology accommodated within the tightest of spaces, totally out of sight and featuring the proven heart-shaped cam which characterises all

DORMA slide channel door closers. The cam is literally at the heart of DORMA slide channel door closers – it guarantees secure closing while at the same time offering a rapidly decreasing opening force so that even children, the elderly and disabled people encounter only minimum resistance as they open the door. However, it is not only these categories of user who benefit. Thanks to the substantial reduction in effort required, this technology offers the ultimate in user convenience to all.

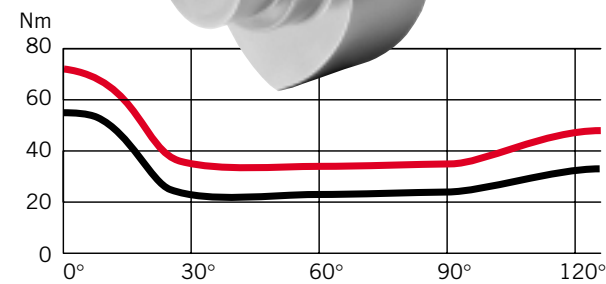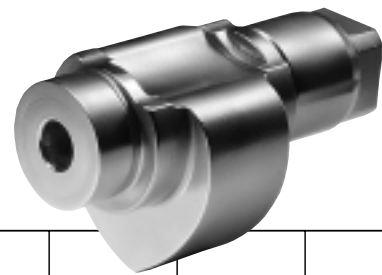

Force profile of an ITS 96 cam action door closer (Size EN 3 – 6, max. closing strength setting)

— Opening force  
— Closing force

Contents	
	Page
<b>DORMA ITS 96</b>	
Features and functions	4
<b>DORMA ITS 96</b>	
Application and installation	6
<b>DORMA G 96 N</b>	
Standard slide channel design	8
<b>DORMA RF</b>	
Hold-open unit	8
<b>DORMA G 96 EMF</b>	
Slide channel with electro-mechanical hold-open	10
<b>DORMA G 96 GSR</b>	
Slide channel door co-ordinator	12
<b>DORMA G 96 GSR-EMF</b>	
Slide channel door co-ordinator with electro-mechanical hold-open	14
<b>DORMA RMZ-K/S, DORMA RM</b>	
Frame-mounted and ceiling-mounted smoke detectors	20
<b>Accessories</b>	22
<b>Hold-open systems</b>	
Regulations and information	25
<b>Range of equipment and optional accessories</b>	26

## Uncompromising technical sophistication

The DORMA ITS 96 has ushered in a new era in door closer technology. The closer body and slide channel are so compact that they can be installed out of sight in doors and their frames. These devices offer the same high quality expected of DORMA door closers, as characterised by their ease of operation for the user, and wide range of functions. Thanks to the exceptionally

slender dimensions of the unit, the DORMA ITS 96 can be installed in virtually all doors with thicknesses of 40 mm or more, and offers all the advantages of quality assured manufacture with third-party auditing.



Quality-assured manufacture to ISO 9001, EN 29001, BS 5750. Certified and verified by BSI Quality Assurance Reg.-No. Q 6423, FM 10756

### Plus points...

#### ...for the trade

- Low inventory costs and reduced stocking requirements thanks to streamlined modular system and separate packaging of closer body and slide channel assemblies.
- Tailor-made applications with special accessories.

#### ...for the installer

- Non-handed system.
- Can be incorporated within the door pre-fabrication process, allowing complete installation in the factory.
- Easy adjustment of the closing strength, closing speed and latch action after hanging of the doors.

#### ...for the specifier/architect

- Unblemished appearance of prestige doors thanks to concealed installation.
- Ideal for doors integral to the interior design.

#### ...for the user


- Optimum protection against vandalism thanks to the concealed installation.
- Enhanced user convenience and fully controlled, reliable closing with adjustable latch action.
- Cushioned limit stay with progressive damping for protection of wall and door.

Data and features		ITS 96	
		EN 2-4	EN 3-6
Variable closing force	Spring strength		
Standard doors	up to 1100 mm up to 1400 mm	• –	• •
External doors, outward opening		–	–
Fire and smoke check doors	up to 1100 mm up to 1400 mm	• –	• •
Door leaf thickness	equal to/greater than 40 mm equal to/greater than 50 mm	• •	– •
Max. door leaf weight in kg		100	180
Non-handed design		•	•
Arm	Slide channel	•	•
Closing force variable by means of adjustable screw		•	•
Closing speed adjustable by means of valve		•	•
Latching speed adjustable by means of valve		•	•
Cushioned limit stay, mechanical		•	•
Delayed action		–	–
Hold-open		○	○
Max. door opening angle (depends on door design)		approx. 120°	
Weight in kg		1.3	2.5
Dimensions in mm			
	Length	277	291
	Overall depth	32	39.5
	Height	42	51
Door closer tested to EN 1154 A		•	
Hold-open devices tested to EN 1155		•	
Door co-ordinators tested to EN 1158		•	

• Yes – No ○ Option



#### Further information

Additional information about many of our products is available from a range of electronic media (Internet, CD-ROM, diskettes). The abbreviated codes next to the computer symbol indicate the search terms.

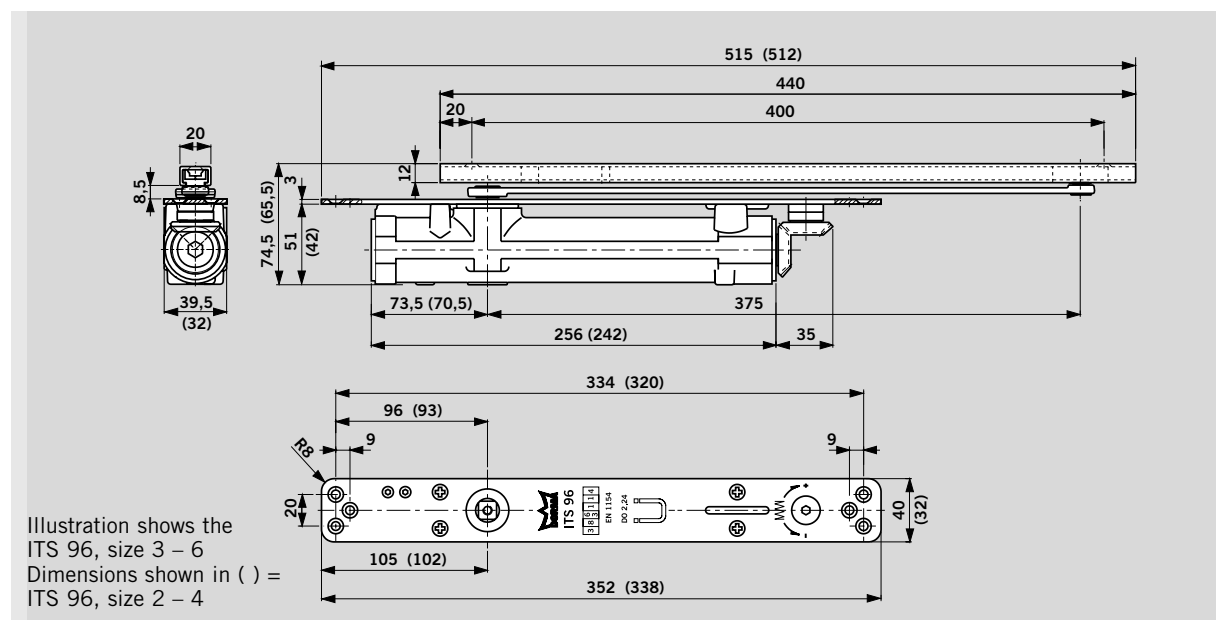

### Adjustment of settings



The functions of the DORMA ITS 96 can be individually adapted to the local conditions of each application. The closing strength can be easily varied in accordance with the door width via the adjustment screw accessible from the top. The closing speed and the latch action can likewise be modified at any time using adjustment screws at the top, even after the door has been hung.

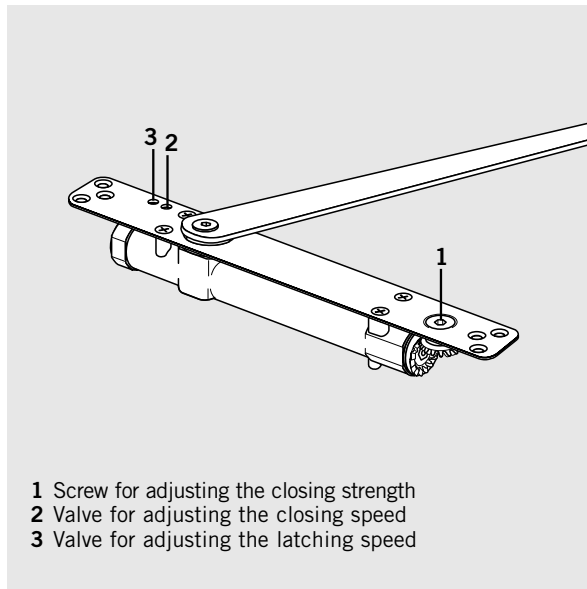

- 2 Fully controlled closing with adjustable speed
- 3 Adjustable latch action
- 4 Cushioned limit stay

### Cushioned limit stay

The integrated mechanically cushioned limit stay of the DORMA ITS 96 is progressively damped to protect the wall and doors from the damage arising from the door being opened too wide (under conditions of normal usage). It can be adjusted to an opening angle between approx. 80° and max. 120°. **The cushioned limit stay feature is not an overload protection device and in many cases cannot replace a doorstop.**

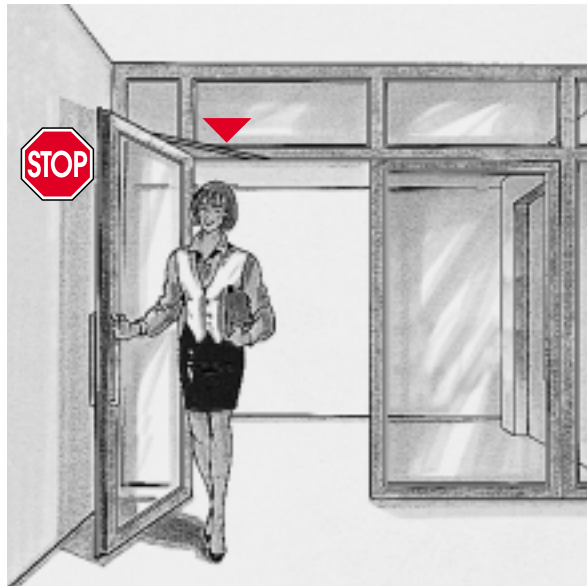

- 4 Cushioned limit stay

### F Approval certification

The DORMA ITS 96 is approved by the State Material Testing Authority, Dortmund, in accordance with EN 1154 A. Additionally, the model size EN 2 – 4 has CERTIFIRE approval for use on timber FD30 doors (code ITT), when installed with the approved intumescent gasket supplied by DORMA.

### Specification text

Cam-action door closer integrated in the door leaf or frame, tested to EN 1154 A, with rapidly decreasing opening torque/force. Closing strength, closing speed and latch action adjustable. Non-handed, with slide channel... (see pages 8 – 15)

#### Size

- EN 2 – 4
- EN 3 – 6


#### Make DORMA ITS 96

- ITS96/2-4
- ITS96/3-6


The DORMA ITS 96 concealed cam action door closer system is suitable for various door designs and different rebate clearance dimensions. This adaptability is achieved through the combination of different spindle lengths in the closer

and the two different slide channel types available. Installation suggestions for the DORMA ITS 96 door closer system relating to the most common door types are available from DORMA on request.


ITS 96 2-4  
ITS 96 3-6




ITS 96 2-4  
ITS 96 3-6  
with 4 mm  
extended spindle



ITS 96 2-4  
ITS 96 3-6  
with 8 mm  
extended spindle




G 96 N  
G 96 EMF  
G 96 GSR/GSR-EMF




K 8


G 96 N  
G 96 EMF  
G 96 GSR/GSR-EMF




K 12

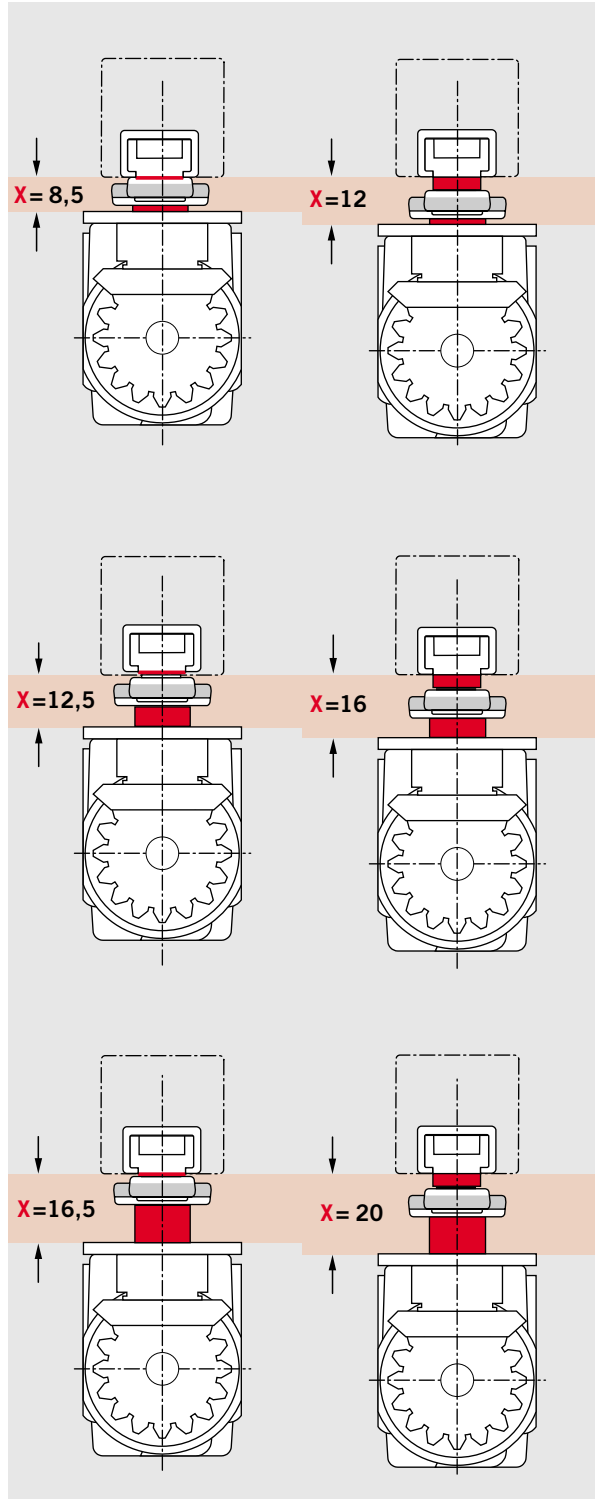


Timber door, flush-closing, clearance 8.5 mm, with ITS 96 EN 3-6 and slide channel G 96 N20 K8.

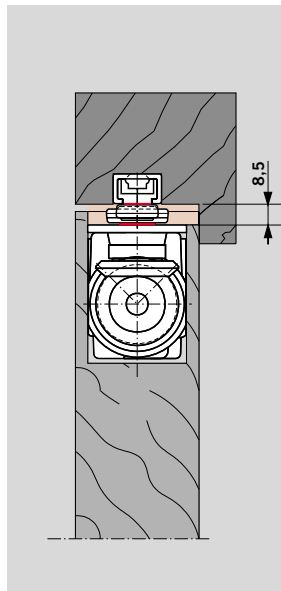


Timber door with steel frame, flush closing, clearance 12.5 mm, with ITS 96 EN 3-6, 4 mm extended spindle and slide channel G 96 N20 K8.


 Please check dimensions carefully

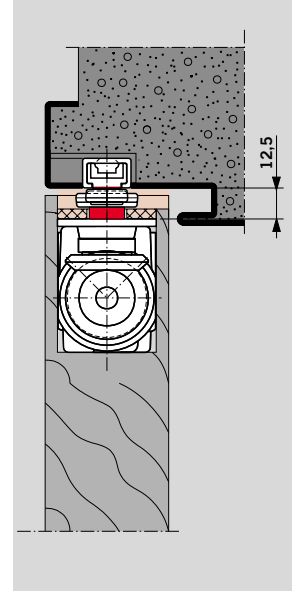


Tubular steel frame door, flush-closing, clearance 12 mm, with ITS 96 EN 3-6 and slide channel G 96 N20 K12.

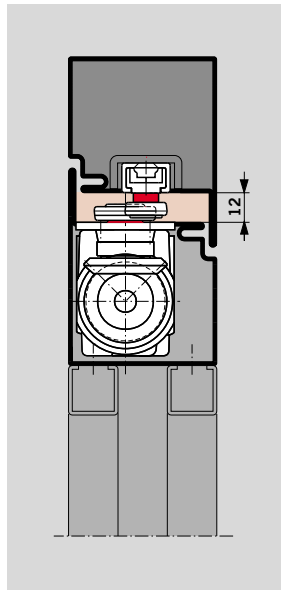


Aluminium tubular frame door, flush-closing, clearance 16 mm, with ITS 96 EN 3-6, 4 mm extended spindle and slide channel G 96 N20 K12.

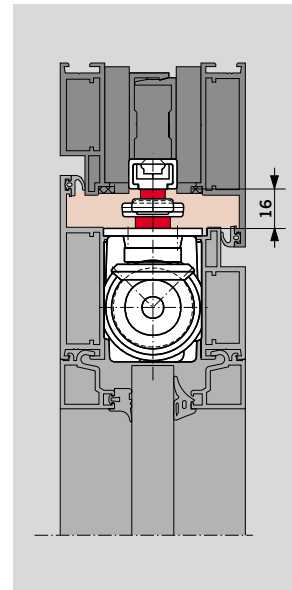


Hollow steel door with steel frame, over-rebated, clearance 12 mm, with ITS 96 EN 3-6, 4 mm extended spindle and slide channel G 96 EMF K8.

 Please check dimensions carefully

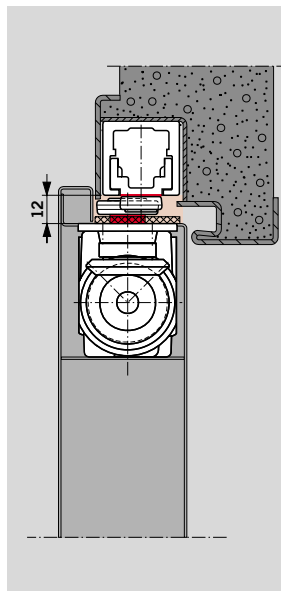


Timber door with solid frame, double rebated, clearance 20 mm, with ITS 96 EN 3-6, 8 mm extended spindle and slide channel G 96 N20 K12.

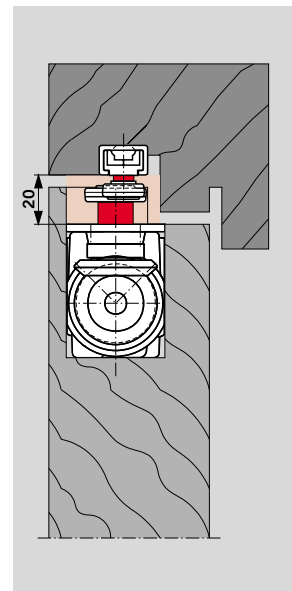


## Standard model

G 96 N20

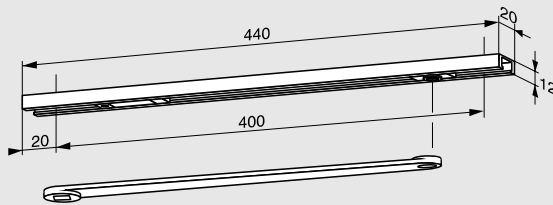

G 96 N

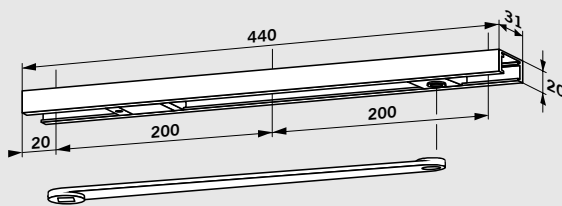

The **DORMA G 96 N20** resp. **G 96 N** slide channel pack includes the arm, slide channel, slide block, cushioned limit stay and fixing screws, and can be combined with both door closer sizes in the DORMA ITS 96 range.

The DORMA G 96 N20 slide channel can be adjusted to K8/K12.

**Note:**  
If a hold-open unit (RF) is to be installed, use the G 96 N slide channel.

### F Approval certification


The G 96 N slide channel is tested to EN 1154 A in conjunction with the DORMA ITS 96. Additionally, it has CERTIFIRE approval for use on timber FD30 doors (code ITT), when installed with the approved intumescent gasket supplied by DORMA.


### Specification text

DORMA ITS 96 ... door closer (see pages 4 and 5) with slide channel


- G 96 N20  
**Version**
  - LH (ISO 6) K8/K12
  - RH (ISO 5) K8/K12
- G 96 N  
**Version**
  - LH (ISO 6)
  - RH (ISO 5)
  - K8
  - K12

**Make** DORMA ITS 96 N

 ITS96/2-4  
ITS96/3-6




## Hold-open unit

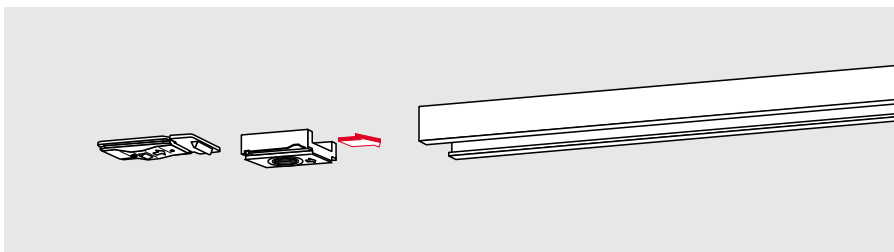

The **DORMA RF** hold-open unit enables doors to be securely held without any fall-back at precisely the required position up to an opening angle of approx. 120°. The hold-open function can be easily switched on and off by the


user, and the release force can be adjusted to the door type concerned. The DORMA RF mechanism is non-handed and has been specifically designed for retrofitting to the G 96 N slide channel.


**Not for fire and smoke check doors.**




### Accessories

- Hold-open unit DORMA RF  
**Version**
  - K8
  - K12


 ITS96RF/2-4  
ITS96RF/3-6

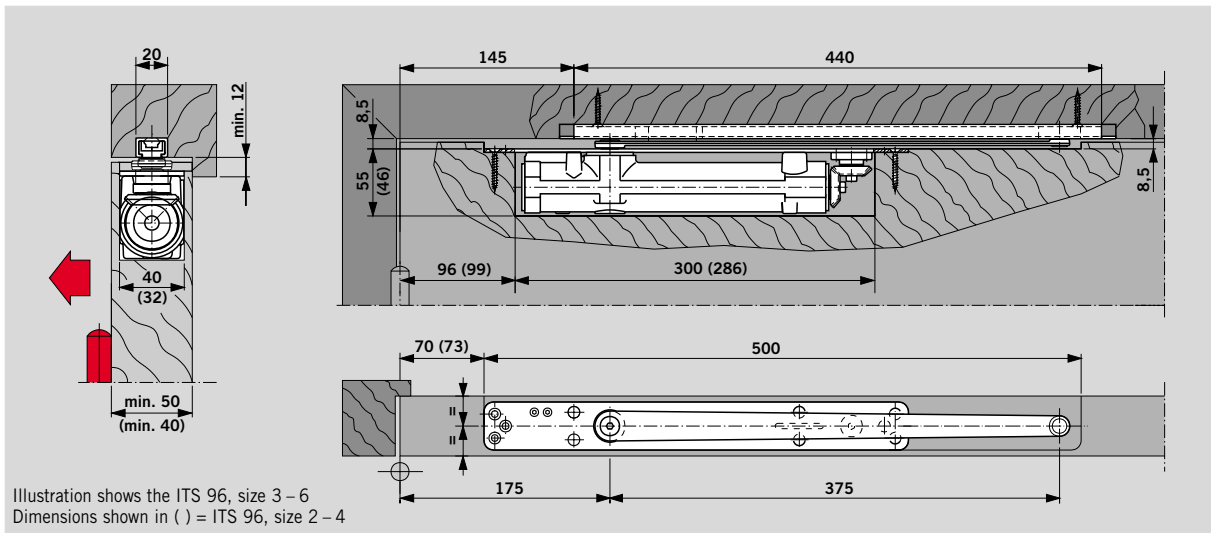

DORMA ITS 96 door closer with DORMA G 96 N20 slide channel in a **timber door**  
Example: Anticlockwise-closing (ISO 6) door; mirror image applies to clockwise-closing (ISO 5) doors.

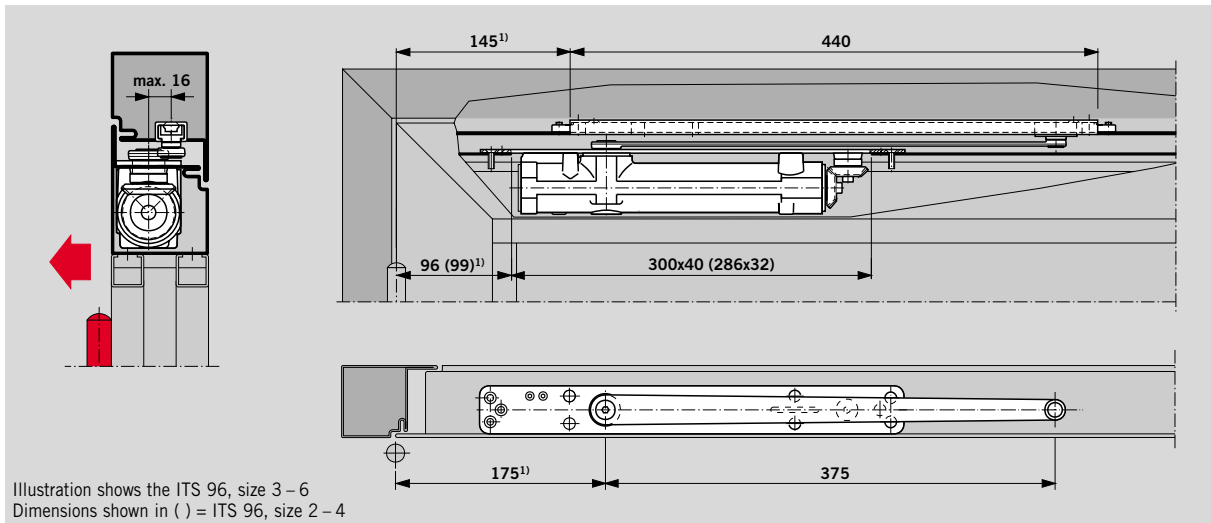



DORMA ITS 96 door closer with DORMA G 96 N20 slide channel in an **aluminium framed door**  
Example: Anticlockwise-closing (ISO 6) door; mirror image applies to clockwise-closing (ISO 5) doors.  
1) Add 25 mm for aluminium profile frames with corner-angle reinforcement.

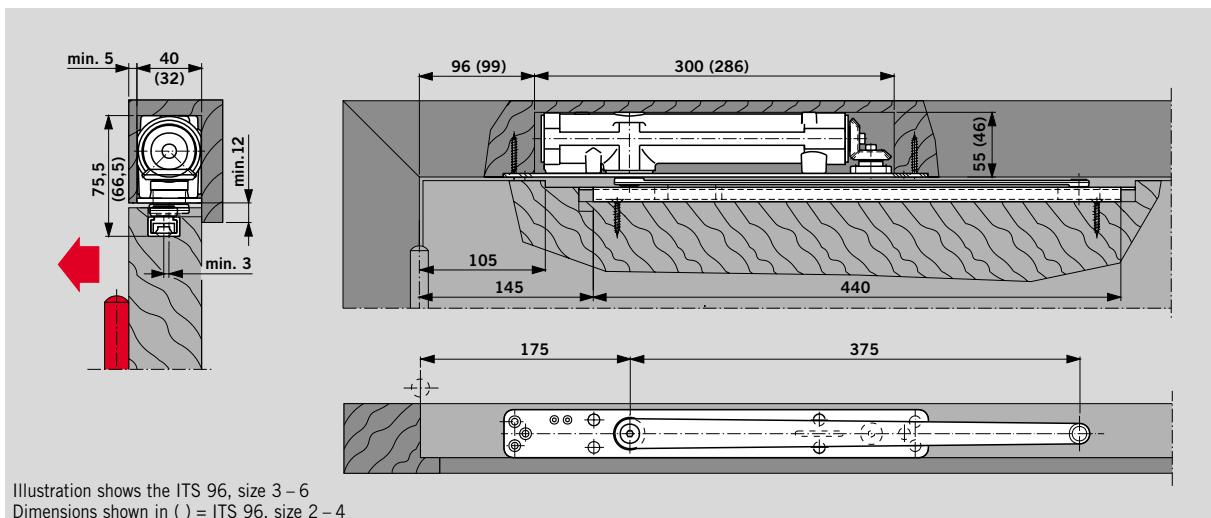

DORMA ITS 96 door closer with DORMA G 96 N20 slide channel in a **timber door-transom fixing**  
Example: Anticlockwise-closing (ISO 6) door; mirror image applies to clockwise-closing (ISO 5) doors.



## Electro-mechanical hold-open

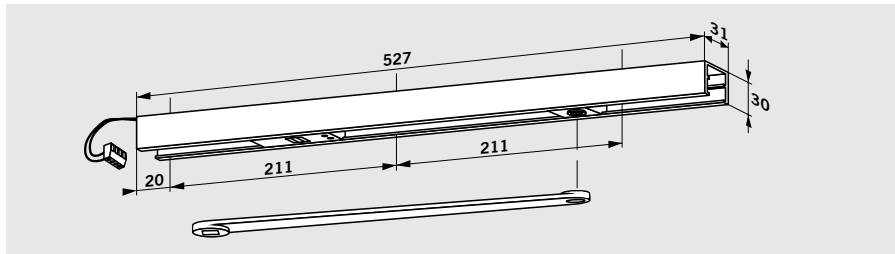

The **DORMA G 96 EMF** slide channel assembly enables the door to be held open securely at a pre-selected position without fall-back. The hold-open point can be adjusted within an opening angle of approx. 80° and 120°.

**Note:**

The hold-open point also constitutes the max. door opening angle (position door stop accordingly).

In the event of an alarm or a fault in the power supply, the hold-open is released and the door is closed by the door closer. The release is triggered by a signal from external smoke detectors (e.g. DORMA RMZ-K/S or DORMA RM). The release force for the hold-open mechanism can be adjusted without tools and is rated to ensure that the door can also be easily released manually.

The DORMA G 96 EMF slide channel assembly comprises the arm, slide channel, slide block, electro-mechanical hold-open unit and fixing screws, and can be combined with both door closer sizes in the DORMA ITS 96 range.

**Specification text**

DORMA ITS 96 ... door closer (see pages 4 and 5) with G 96 EMF slide channel assembly, with integrated 24 V DC electro-mechanical hold-open, tested to EN 1155. Hold-open point (80° – 120°) and release force adjustable. Approved by the Institute for Building Technology, Berlin, for general use in hold-open systems. Acceptance inspection of the system is mandatory in Germany.

**Technical data**

Operating voltage:	24 V DC, ± 15%
Power input:	1.4 W
Rated for continuous duty:	100%
Release force:	Adjustable


**Version**


- LH (ISO 6)
- RH (ISO 5)
- K8
- K12

**Make** DORMA ITS 96 EMF


- ITS96EMF/2-4
- ITS96EMF/3-6

**Example application for a hold-open system**

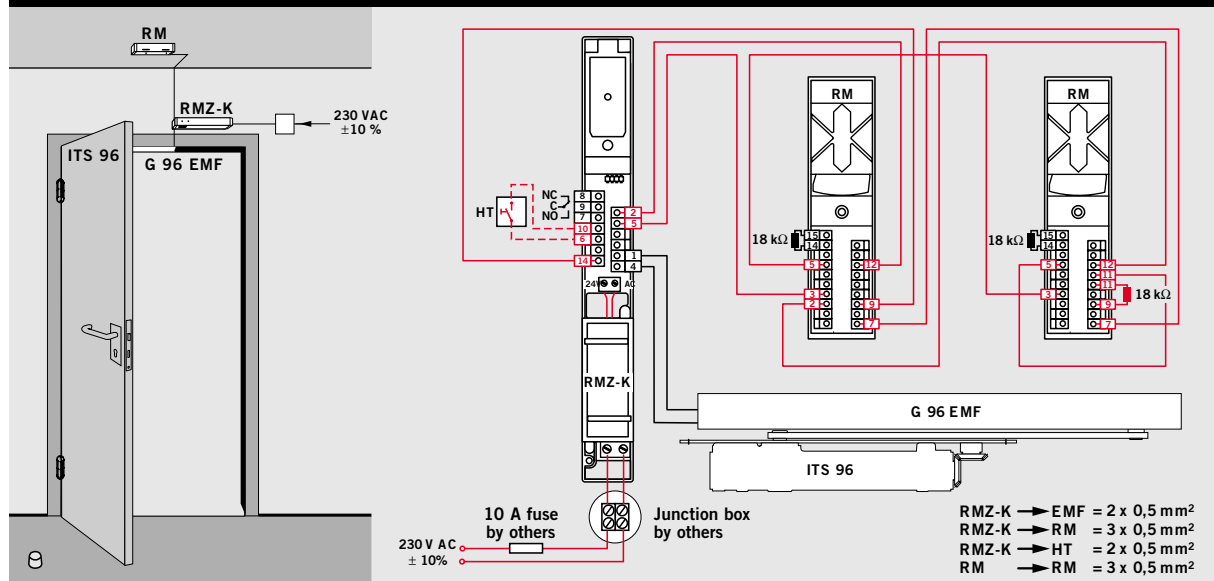

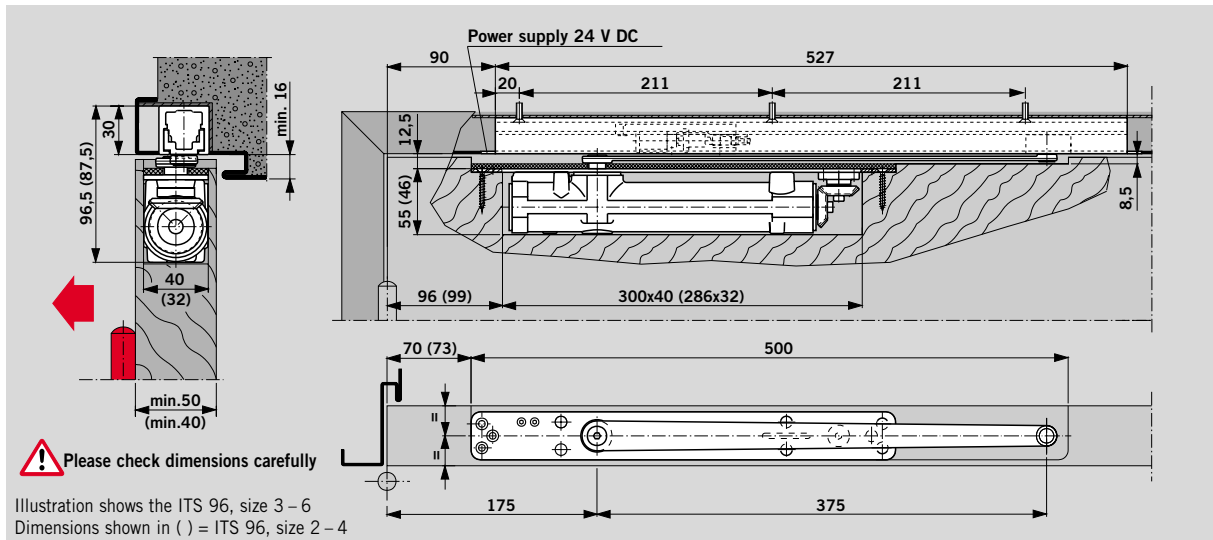

DORMA ITS 96 door closer with DORMA G 96 EMF side channel assembly in a **timber door**  
Example: Anticlockwise-closing (ISO 6) door; mirror image applies to clockwise-closing (ISO 5) doors.

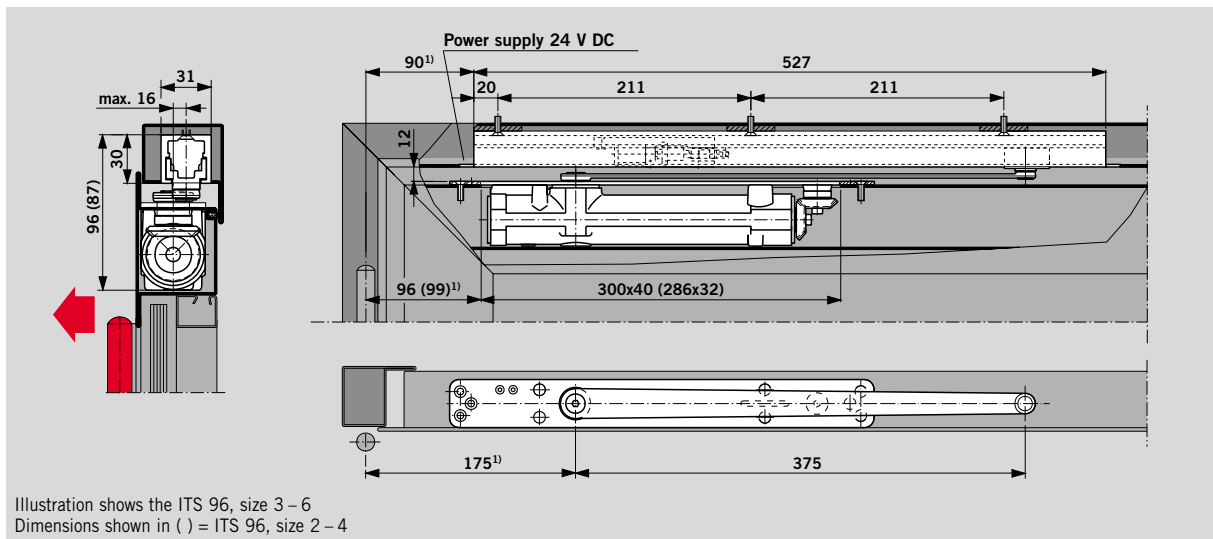

DORMA ITS 96 door closer with DORMA G 96 EMF side channel assembly in an **aluminium framed door**  
Example: Anticlockwise-closing (ISO 6) door; mirror image applies to clockwise-closing (ISO 5) doors.  
<sup>1)</sup> Add 25 mm for aluminium profile frames with corner-angle reinforcement.

### F Approval certification

The DORMA ITS 96 EMF has been tested by the State Material Testing Authority, Dortmund, to EN 1155, Electrically Powered Hold-open Devices.

### Regulations/Information

The use of hold-open devices may be subject to certain conditions – see page 25.


## Door co-ordinator

The **DORMA G 96 GSR** slide channel with integral door co-ordinator for pairs of doors ensures that the active leaf always closes after the inactive leaf.

The DORMA G 96 GSR slide channel door co-ordinator features a push rod clamping system. As this system operates independently of door closer hydraulics, it offers maximum safety and reliability.

An overload release protects the door co-ordinator and the door set from damage. The DORMA G 96 GSR can be combined with both door closer sizes of the DORMA ITS 96 range.


Version/Function	Door width (mm)	Door leaf thickness min. (mm)	Closer size ITS 96
<b>GSR</b> Door co-ordinator	1400 – 2200	40	2 – 4
	1400 – 2800	50	3 – 6

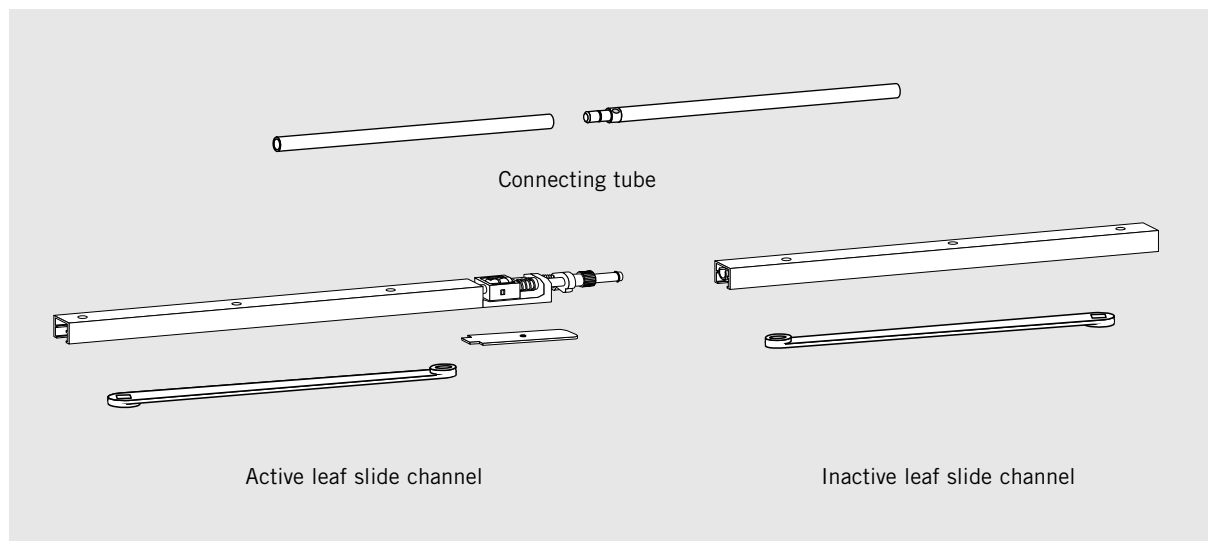

A DORMA G 96 GSR slide channel door co-ordinator encompasses an active leaf and an inactive leaf slide channel with cushioned limit stay, a connecting tube, a cover for the co-ordinator mechanism on the active leaf slide channel, and two arms.

### F Approval certification

The DORMA ITS 96 GSR has been tested to EN 1158, Door Co-ordinator Devices by the State Material Testing Authority, Dortmund/Germany.

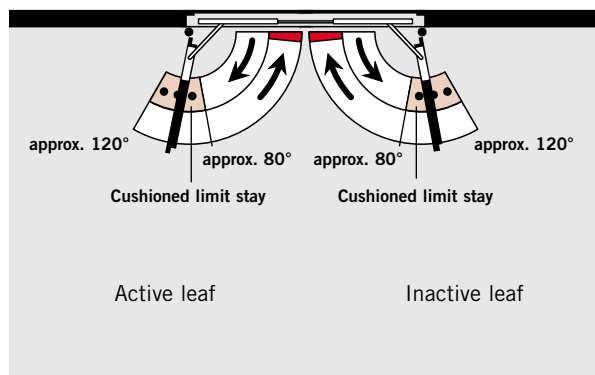

### Specification text

DORMA ITS 96 ... door closer (see pages 4 – 5) with G 96 GSR slide channel, featuring integrated mechanical door co-ordinator using a push rod clamping system with overload release which operates independently of the closer hydraulics. Standard design – door leaves with no hold-open. Tested to EN 1158.

Approved by the Institute of Building Technology, Berlin, for general use in conjunction with fire and smoke check doors.

#### Version


- K8
- K12

#### Make

DORMA ITS 96 GSR

- ITS96GSR/2-4
- ITS96GSR/3-6

### Example application

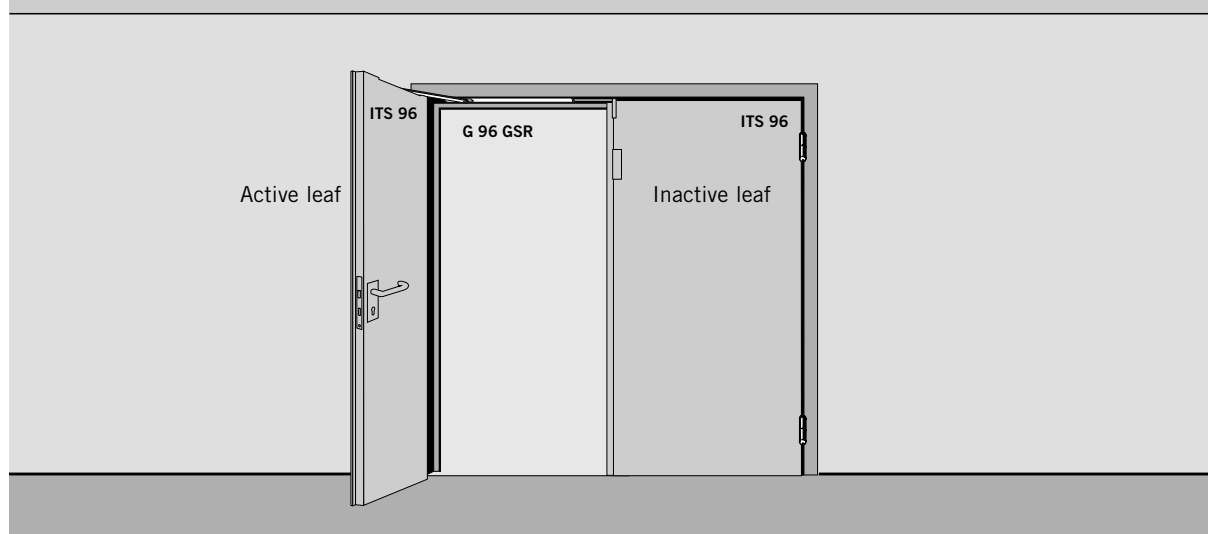

## Door co-ordinator with electro-mechanical hold-open

This door co-ordinator not only ensures the correct closing sequence of pairs of doors, but also allows the door leaves to be individually held open by an electro-mechanical device. The hold-open point for both door leaves lies between approx. 80° and 120°.

**Note:**

The hold-open point also constitutes the max. door opening angle – position door stop accordingly.

In the event of an alarm or a fault in the power supply, the hold-open is released and the door is closed by the door closer. The release is initiated by a signal from external smoke detectors (e.g. DORMA RMZ-K/S or DORMA RM) or other fire alarm.


The release force for the hold-open mechanism can be adjusted without tools and is rated to ensure that the door can also be easily released manually.

The DORMA G 96 GSR-EMF slide channel door co-ordinator can be combined with both door closer sizes of the DORMA ITS 96 range.

### Regulations/Information

The use of hold-open devices may be subject to certain conditions – see page 25.

Version/Function	Door width (mm)	Door leaf thickness min. (mm)	Closer size ITS 96
<b>GSR-EMF</b>			
Door-coordinator and hold-open in both leaves	1400 – 2200	40	2 – 4
	1400 – 2800	50	3 – 6

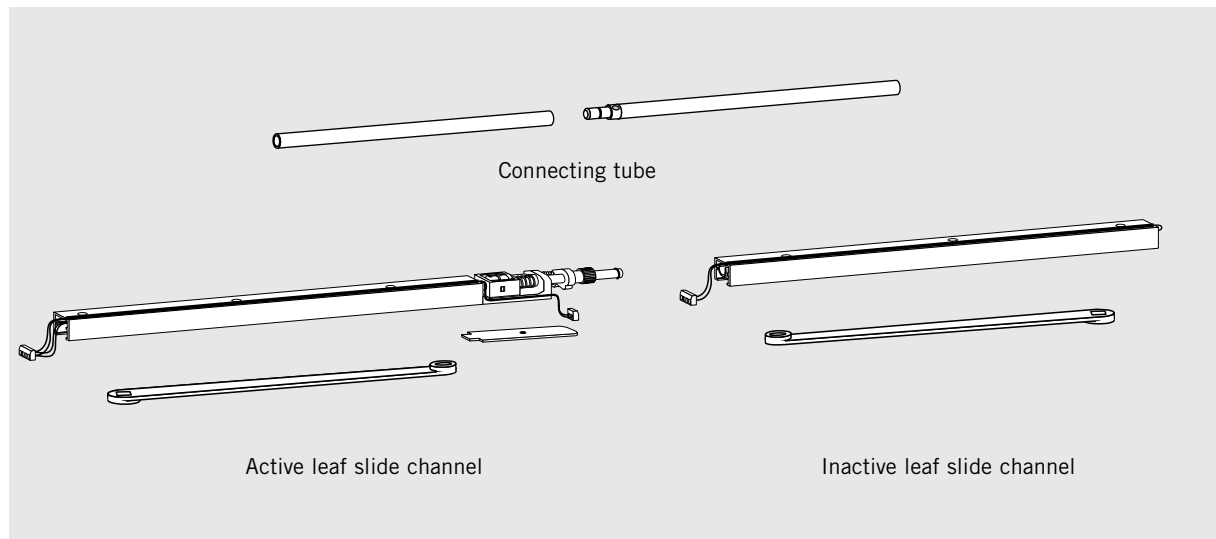


A DORMA G 96 GSR slide channel door co-ordinator encompasses an active leaf and an inactive leaf slide channel with electro-mechanical hold-open, a connecting tube, a cover for the co-ordinator mechanism on the active leaf slide channel, and two arms.

### Technical data

Operating voltage:	24 V DC, $\pm 15\%$
Power input:	2.8 W
Rated for continuous duty:	100%
Release force:	Adjustable

### F Approval certification

The DORMA ITS 96 GSR-EMF has been tested by the State Materials Testing Authority, Dortmund, to EN 1158, Door Co-ordinator Devices, and EN 1155, Electrically Powered Hold Open Devices.

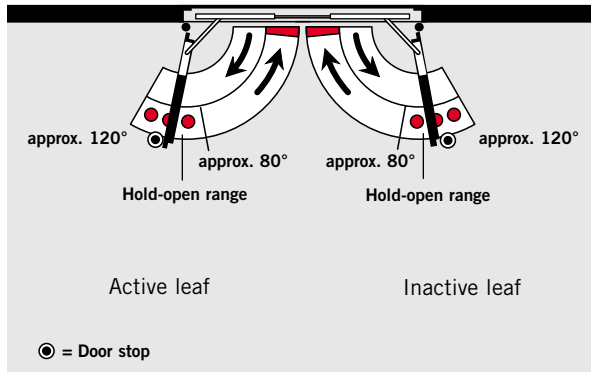

### Specification text

DORMA ITS 96 ... door closer (see pages 4 – 5) with G 96 GSR-EMF slide channel, featuring integrated mechanical door co-ordinator using a push rod clamping system with overload release which operates independently of the closer hydraulics, with integrated electro-mechanical hold-open, 24 V DC. Hold-open point (80° – 120°) and release force adjustable. Tested to EN 1158 and EN 1155.

Approved by the Institute of Building Technology, Berlin, for general use in hold-open systems. Acceptance inspection of the system is mandatory in Germany.

#### Version



- K8
- K12

#### Make


DORMA ITS 96 GSR-EMF

- ITS96GSR-EMF/2-4
- ITS96GSR-EMF/3-6

### Example application, hold-open system

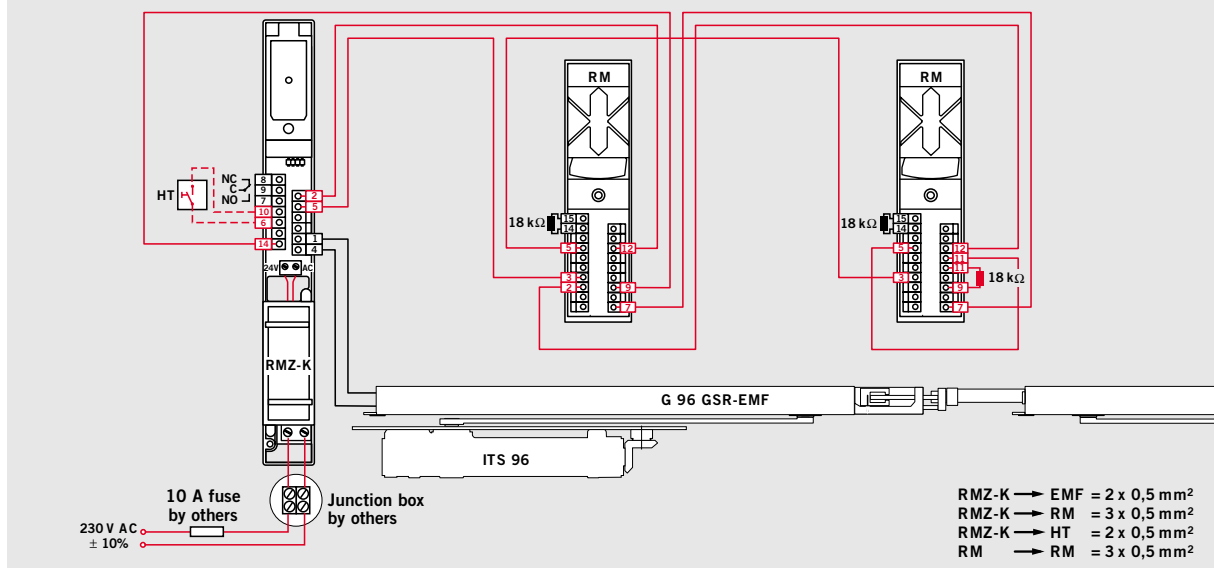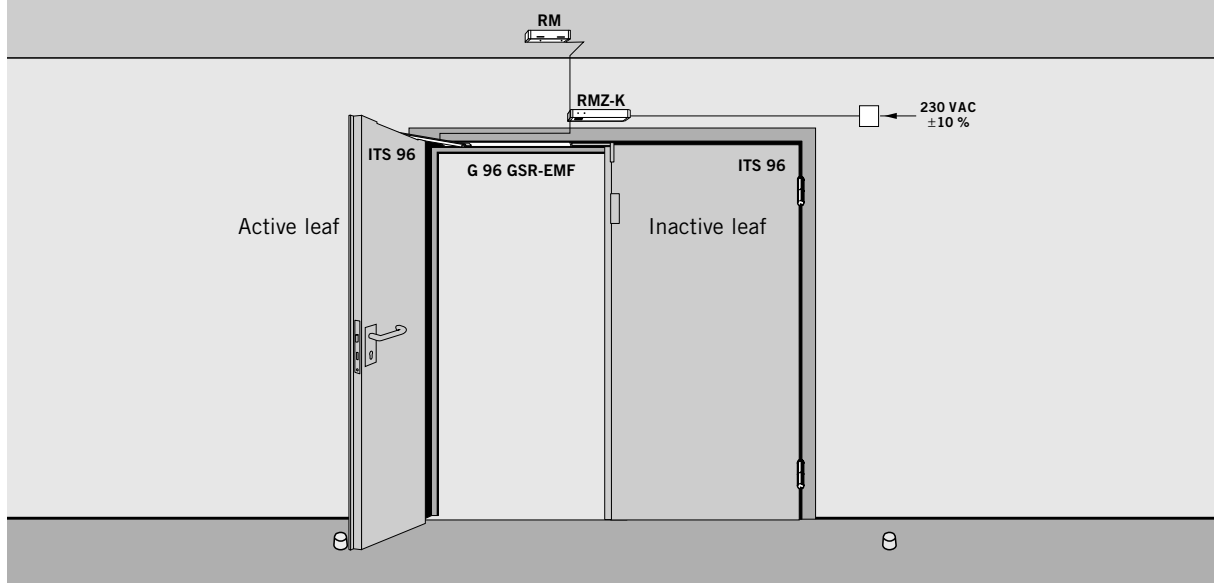


## Installation in a timber door

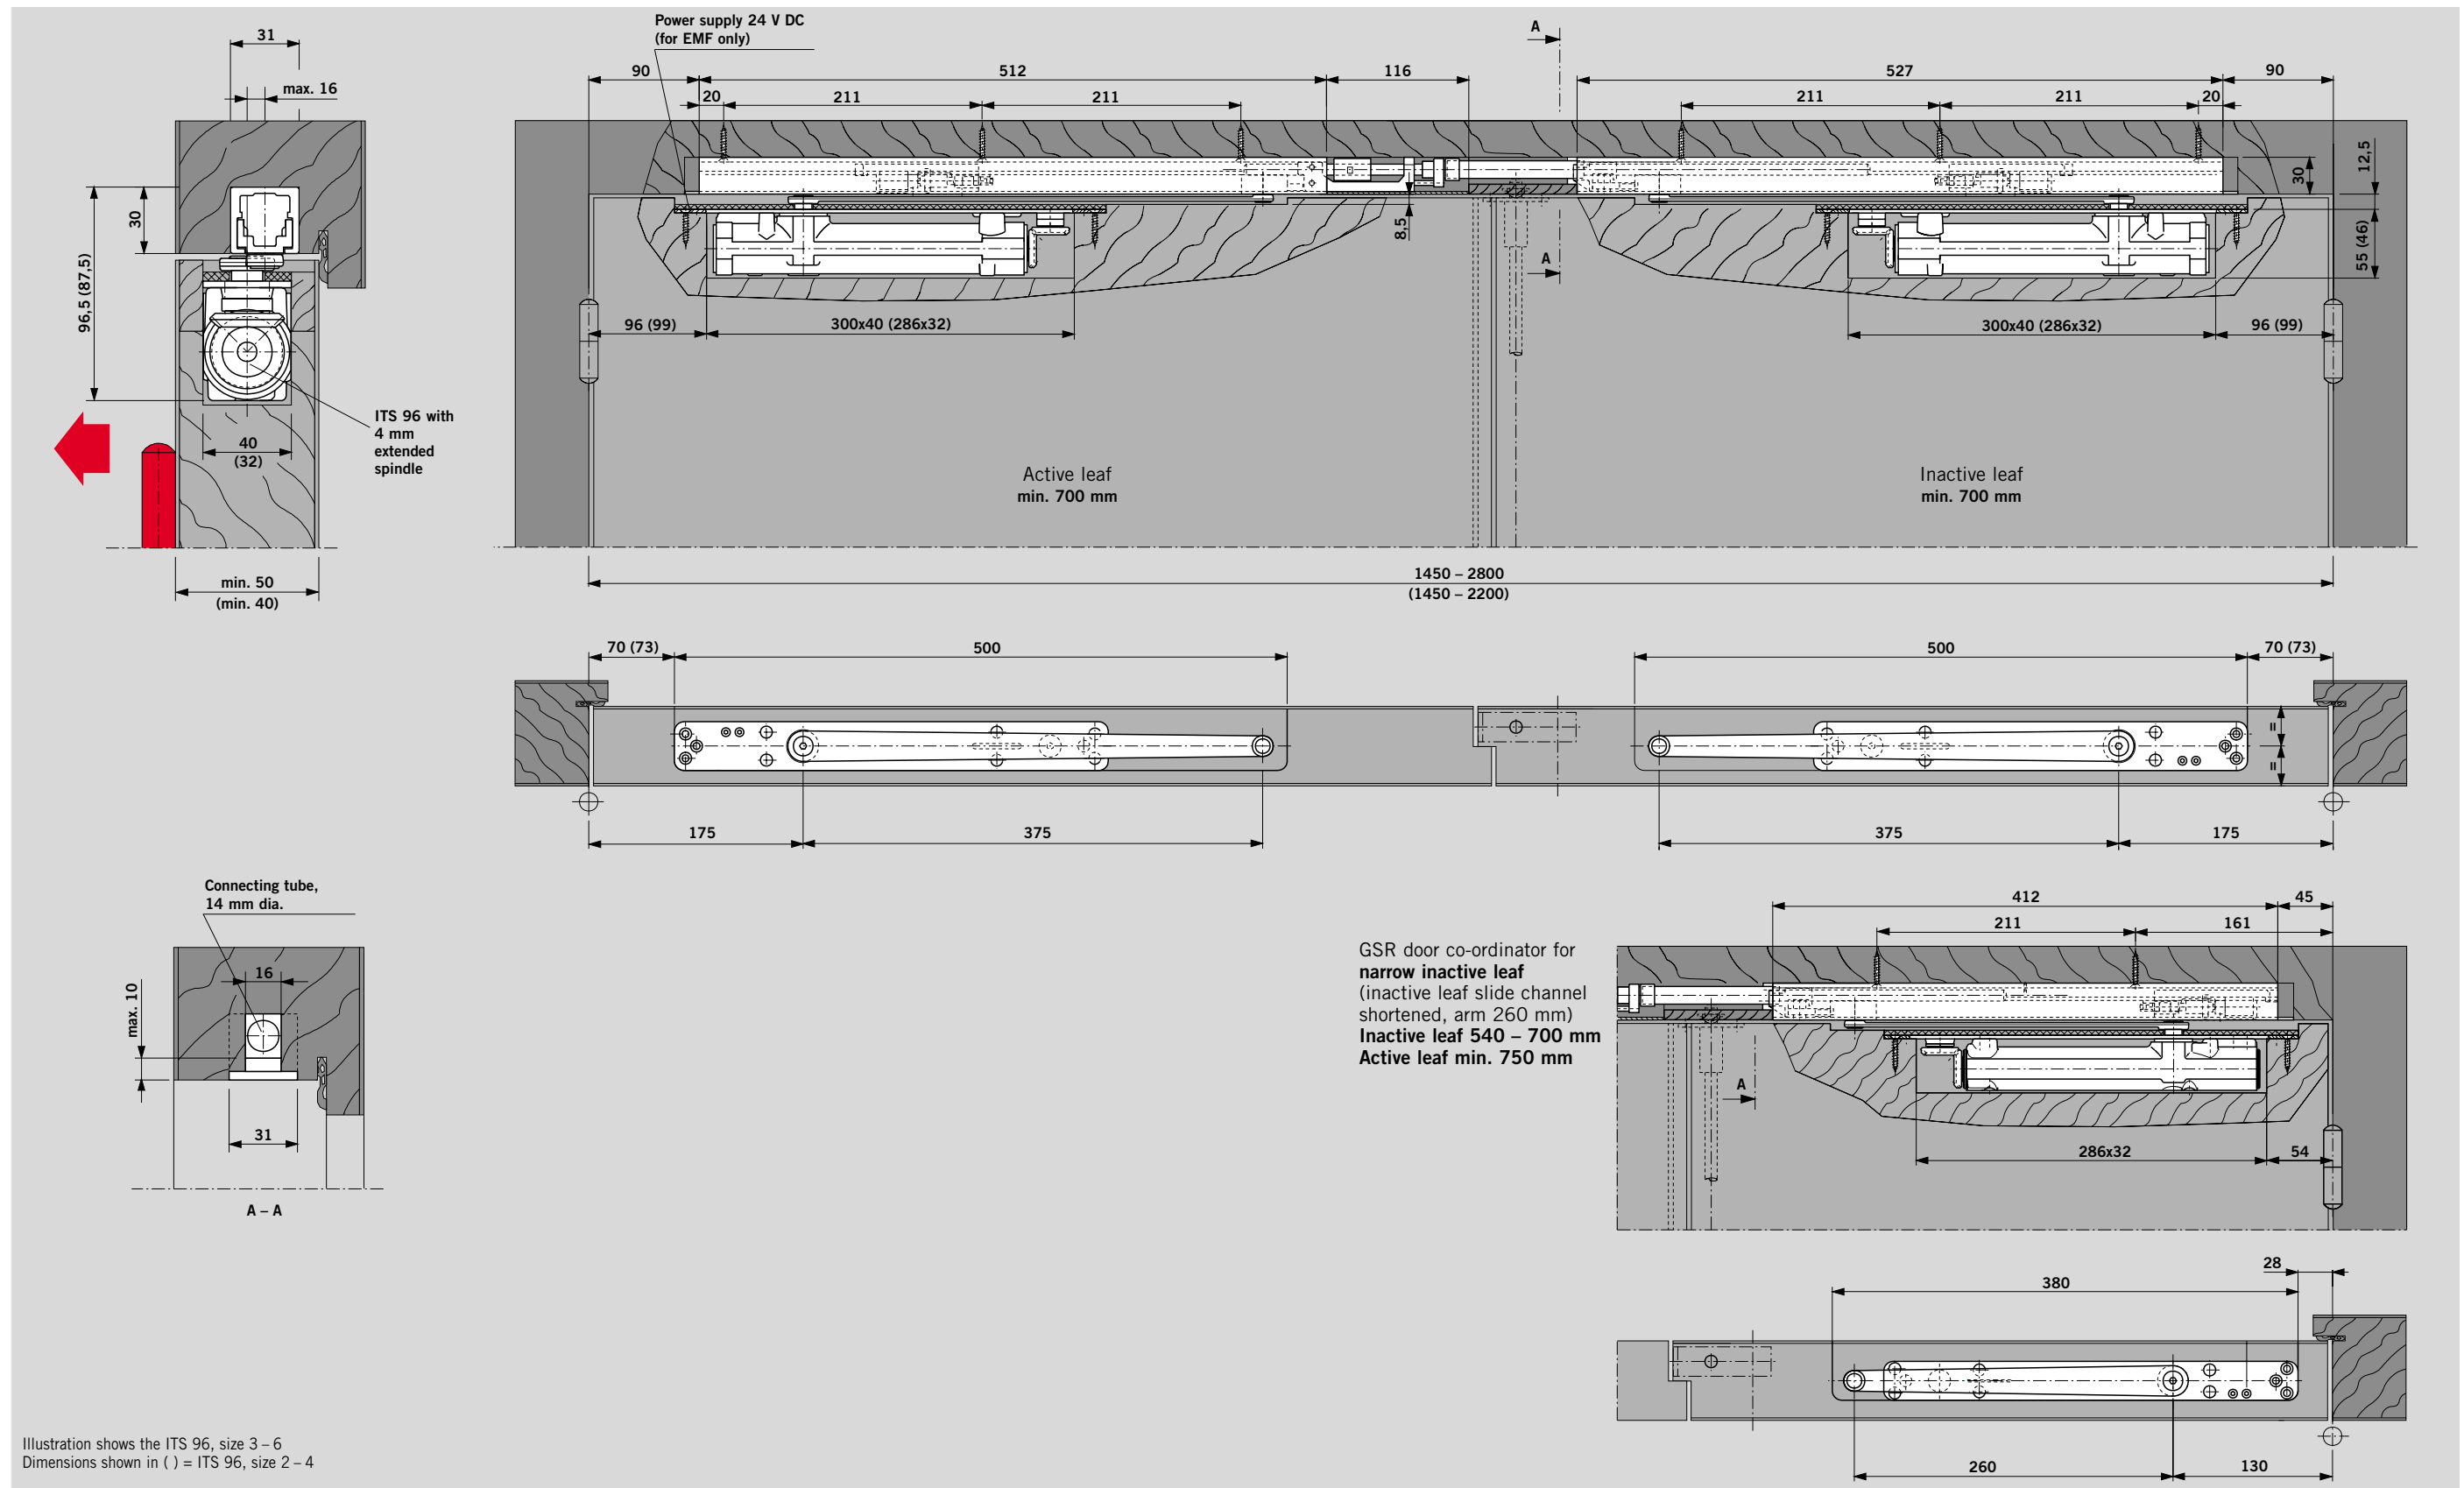

DORMA ITS 96 door closer with DORMA G 96 GSR/GSR-EMF slide channel  
Example: Anticlockwise-closing (ISO 6) active leaf; mirror image applies to clockwise-closing (ISO 5) active leaf.

**F** When installed in fire and smoke check doors, ensure that the DORMA MK 397 carry bar is also fitted.

## Installation in an aluminium framed door

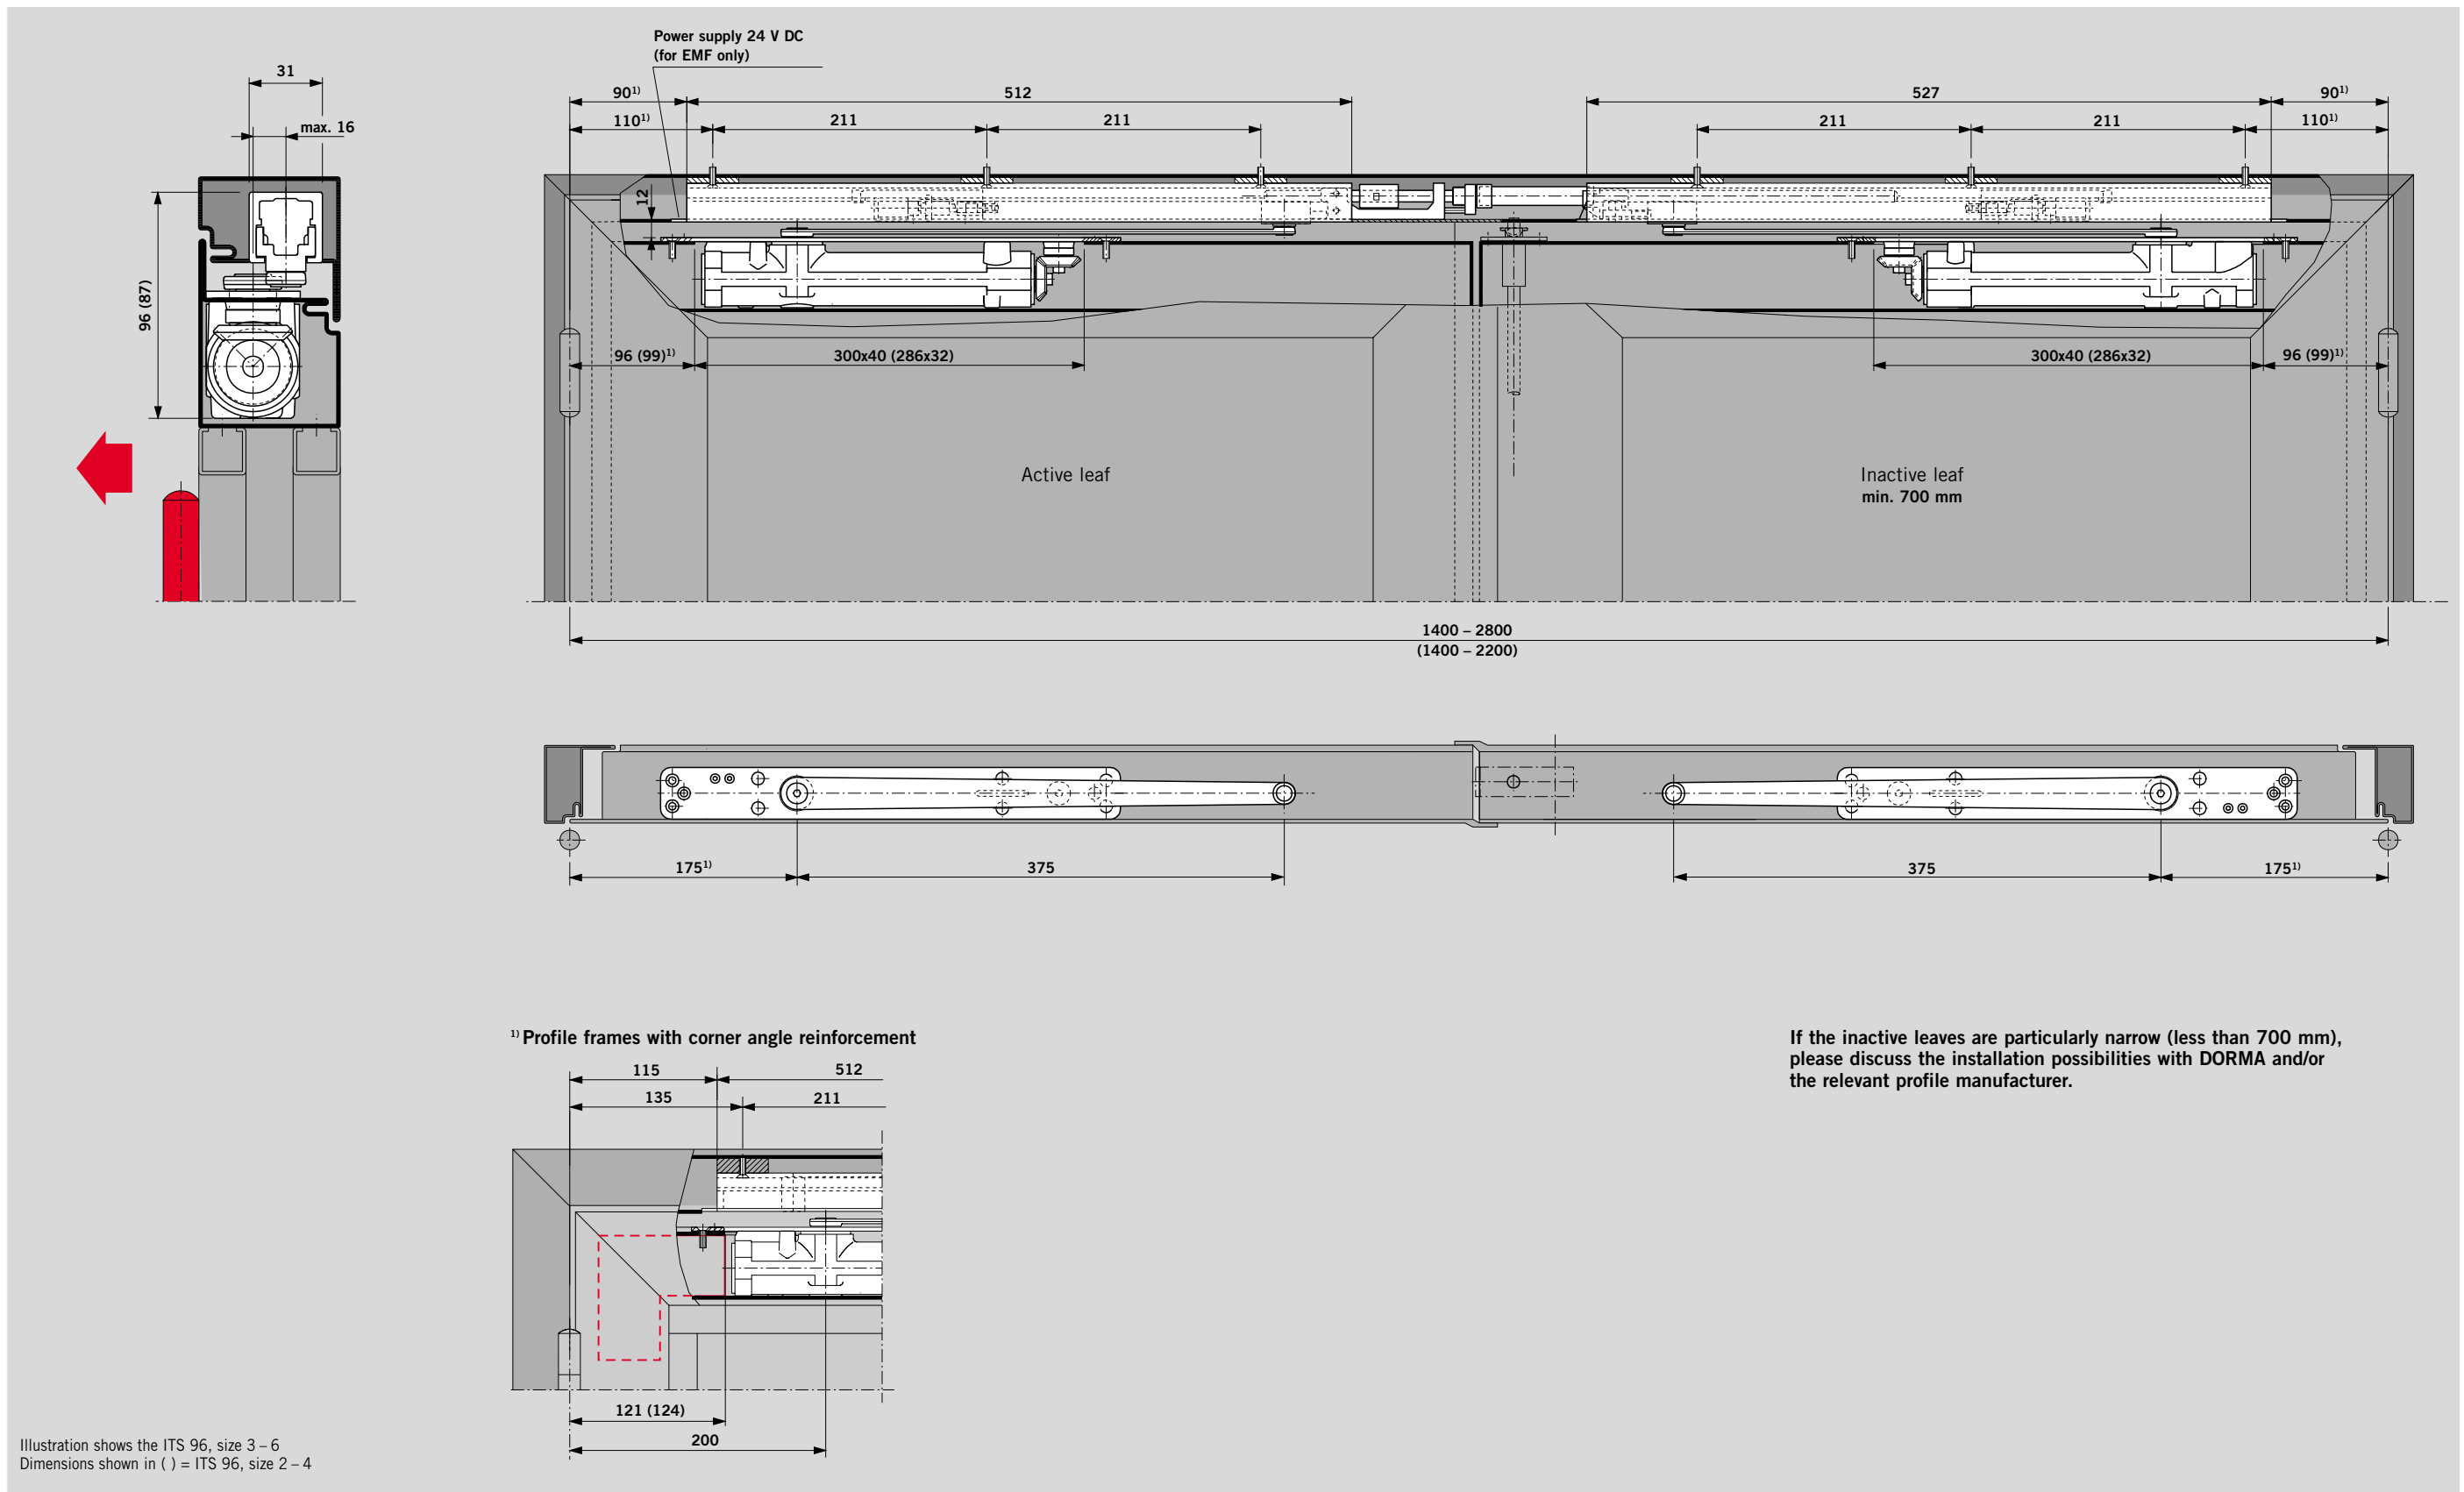

DORMA ITS 96 door closer with DORMA G 96 GSR/GSR-EMF slide channel  
Example: Anticlockwise-closing (ISO 6) active leaf; mirror image applies to clockwise-closing (ISO 5) active leaf.

**F** When installed in fire and smoke check doors, ensure that the DORMA MK 397 carry bar is also fitted.



The DORMA RMZ-K/S frame-mounted smoke detector and the DORMA RM frame and ceiling-mounted smoke detector provide the ideal complement to the successful, service-proven DORMA ITS 96 range of preventative fire protection products.

They are designed in accordance with the latest codes issued by the German Institute for Building Technology, and ensure perfect interaction between all the devices employed for holding open fire and smoke doors –

whatever the situation. The innovative design of these devices has ensured a high degree of compactness so that there are no installation or positioning problems. And their attractive Softline styling blends in with any surroundings.


**F Approval certification**

DORMA RMZ-K/S and DORMA RM units have been approved by the German Institute for Building Technology, Berlin, as hold-open release devices.

**DORMA RMZ-K/S**

Frame-mounted smoke detector with stabilised power supply unit. This detector is available as an Enhanced or Standard model.


In the event of an alarm or a power failure, this unit de-energises all the hold-open devices connected to it (release function).

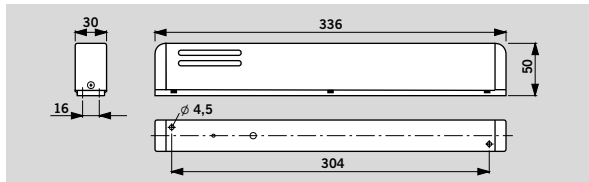

**DORMA RM**

Designed as a smoke switch; actuates a floating (volt-free) change-over contact in the event of an alarm or power failure.

Also suitable as an add-on smoke detector for the DORMA TS 73 EMR, TS 93 EMR and RMZ. Tested by VdS Cologne to EN 54, Part 7.

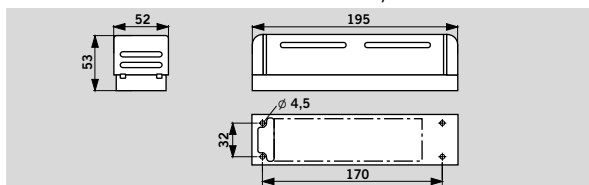

**Specification texts**

**RMZ-K/S**

Smoke detector for frame mounting with integrated power supply unit and optical smoke sensor. For release of DORMA hold-open devices. With connections for further smoke detectors. Floating (volt-free) change-over contact and connection terminals for external manual release. Input voltage 230 V AC Operating voltage 24 V DC Approved by the Institute for Building Technology in Berlin as a hold-open release device.

**Colour**

- silver  dark brown white, like RAL  9010  9016
- stainless steel
- polished brass
- special colour \_\_ (like RAL \_\_)

**Model**

- Enhanced model with optional connection of additional detectors, external manual release and floating (volt-free) alarm contact. **Make DORMA RMZ-K**
- Standard model with optional connection of additional 2-wire detectors **Make DORMA RMZ-S**



Data and features		RMZ-K	RMZ-S	RM
Functions	Smoke detector Release device Power supply unit	● ● ●	● ● ●	● ● –
Smoke detection	Scattered light principle (optical sensor)	●	●	●
Fixing	Frame-mounted Ceiling-mounted	● –	● –	● ●
Connection of other detectors	2-wire smoke switches	● ●	● –	● ●
Total installed load (max.) for hold-open device and other detectors in W		4.4	4.4	Depends on power supply unit
Power input of internal detectors in W		0.5	0.5	0.6
Indicators	Alarm – red LED Armed – green LED	● ●	● ●	● ●
Input voltage		230 V AC ± 10 %	230 V AC ± 10 %	24 V DC +15%, -10%
Output voltage		24 V DC	24 V DC	24 V DC
Detector operating voltage		24 V DC	24 V DC	24 V DC +15%, -10%
Input current (max.) with external power supply unit, in A		–	–	2
Current input (max.) in mA		111	91	25
Floating change-over contact	Switching voltage (max.)	60 V DC/ 25 V AC	–	60 V DC/ 25 V AC
	Switching current (max.)	2 A	–	2 A
	Switching capacity (max.)	60 W	–	60 W
Automatic reset can be change to manual reset		● –	● –	● ●
Test port for functional checking		●	●	●
Connection terminals for external manual release		●	–	●
Degree of protection		IP 20	IP 20	IP 20
Ambient temperature in °C		–15, +60	–15, +60	–20, +50
Weight in kg		0.6	0.6	0.4
Dimensions in mm	Length	336	336	195
	Overall depth	50	50	53
	Height	30	30	52

● yes – no

For more detailed information, see RMZ/RM brochure


**RM**

Non-directional, universal optical smoke detector (24 V DC) for frame and ceiling installation. Can be employed as smoke switch and monitoring device for hold-open devices. With connections for further smoke detectors, floating (volt-free) change-over contact and connection terminals for external manual release. Approved by the Institute for Building Technology, Berlin for general use as a hold-open release device and tested by the VdS Cologne to EN 54 Part 7.


**Colour**

- silver  dark brown white, like RAL  9010  9016
- stainless steel
- polished brass
- special colour \_\_ (like RAL \_\_)




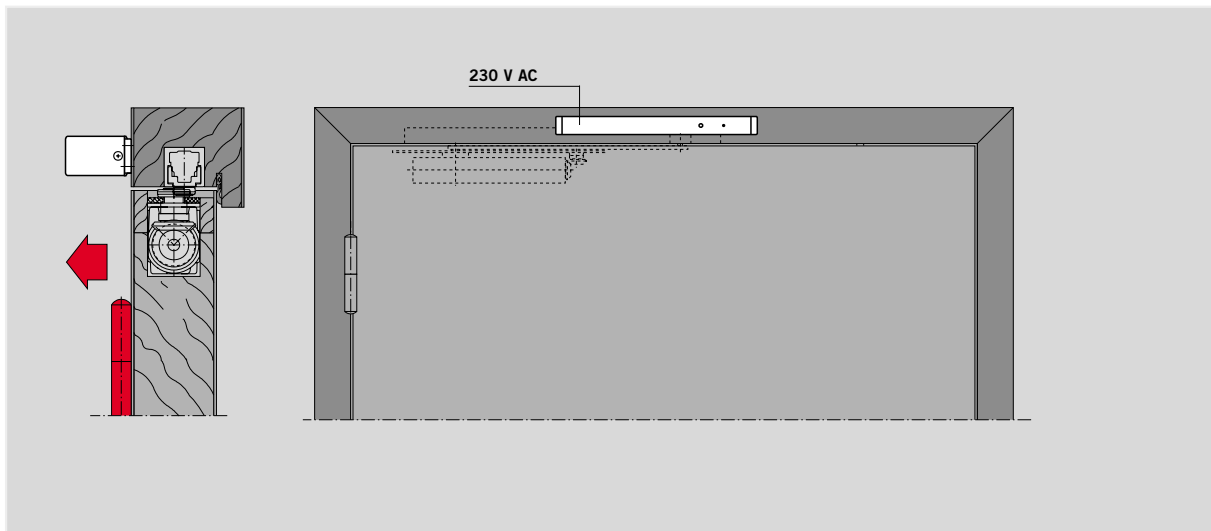


RMZ-K/S frame-mounted smoke detector on the pull side connected to an ITS 96 EMF  
 Example: Anticlockwise-closing (ISO 6) door; mirror image applies to clockwise-closing (ISO 5) doors.

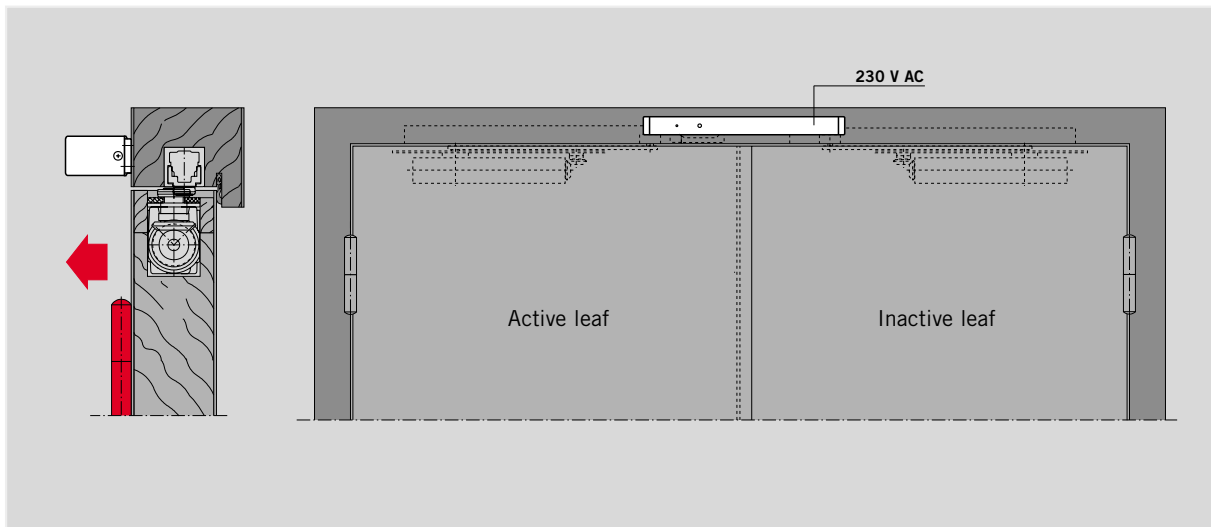

RMZ-K/S frame-mounted smoke detector on the pull side connected to an ITS 96 GSR-EMF  
 Example: Anticlockwise-closing (ISO 6) active leaf; mirror image applies to clockwise-closing (ISO 5) active leaf.

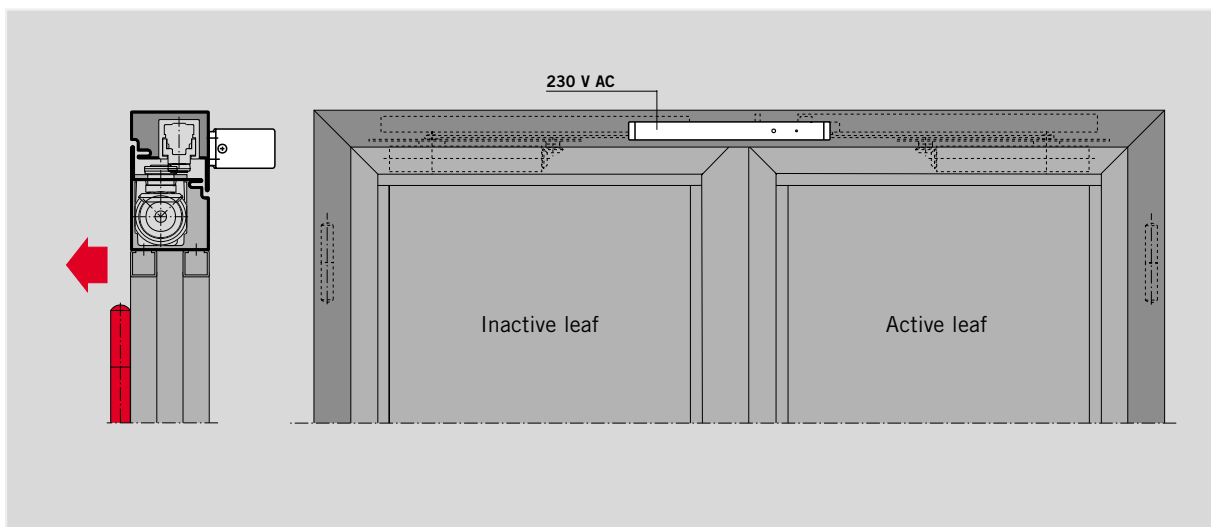


RMZ-K/S frame-mounted smoke detector on the push side connected to an ITS 96 GSR-EMF  
 Example: Anticlockwise-closing (ISO 6) active leaf; mirror image applies to clockwise-closing (ISO 5) active leaf.

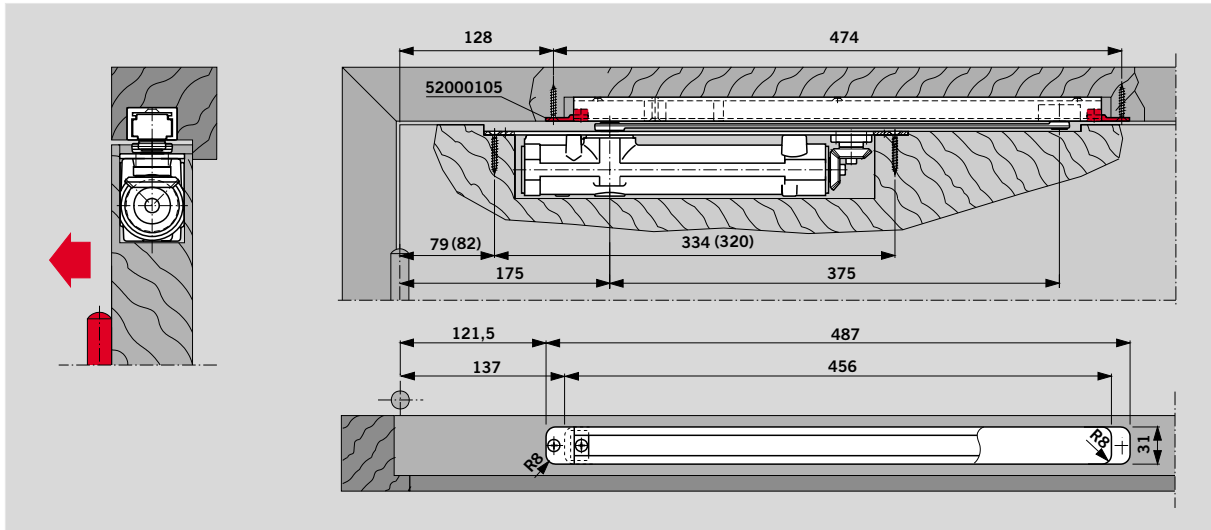


Fixings for G 96 N in conjunction with **timber doors**

Example: Anticlockwise-closing (ISO 6) door; mirror image applies to clockwise-closing (ISO 5) doors.

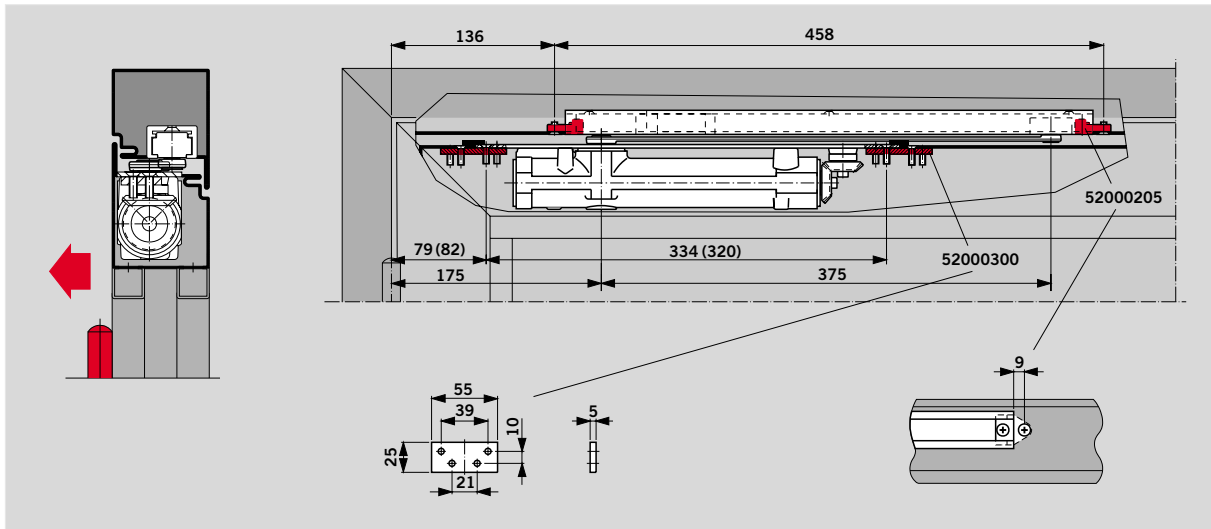

Fixings for ITS 96 and G 96 N in conjunction with **aluminium framed doors**

Example: Anticlockwise-closing (ISO 6) door; mirror image applies to clockwise-closing (ISO 5) doors.

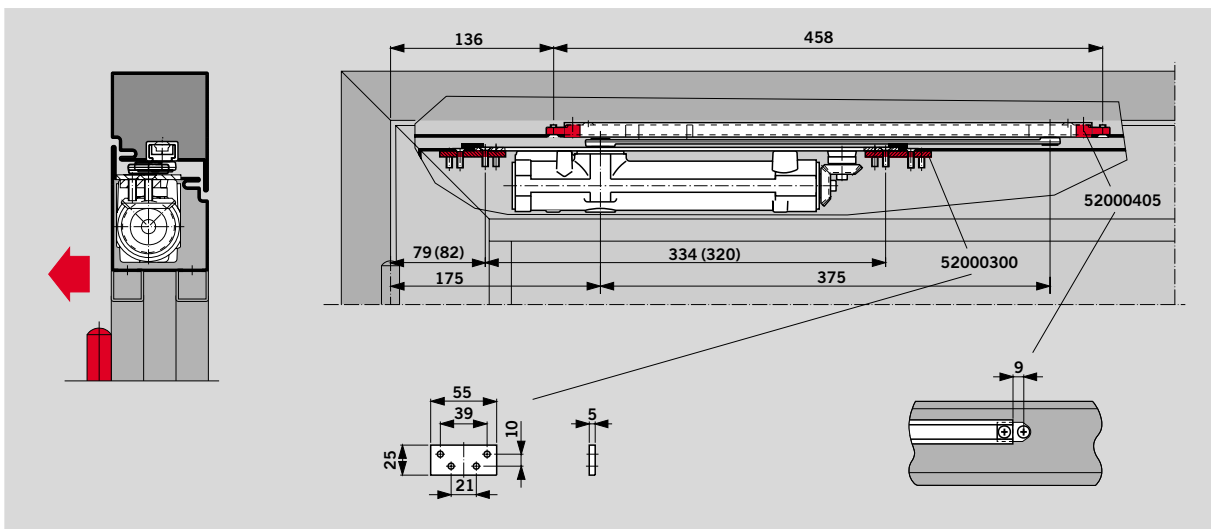

Fixings for ITS 96 and G 96 N20 in conjunction with **aluminium framed doors**


Example: Anticlockwise-closing (ISO 6) door; mirror image applies to clockwise-closing (ISO 5) doors.

If the DORMA G 96 GSR door co-ordinators are required to operate independently of the ITS 96 door closers, e.g. in combination with the ED 200 automatic swing door operator, the connection between the door co-ordinator and the door leaf is provided by means of GSR pivot blocks.


**Specification text**

Pivot bearing for closer-independent door co-ordination with DORMA G 96 GSR door co-ordinators.

**Make**  
DORMA ITS GSR pivot block

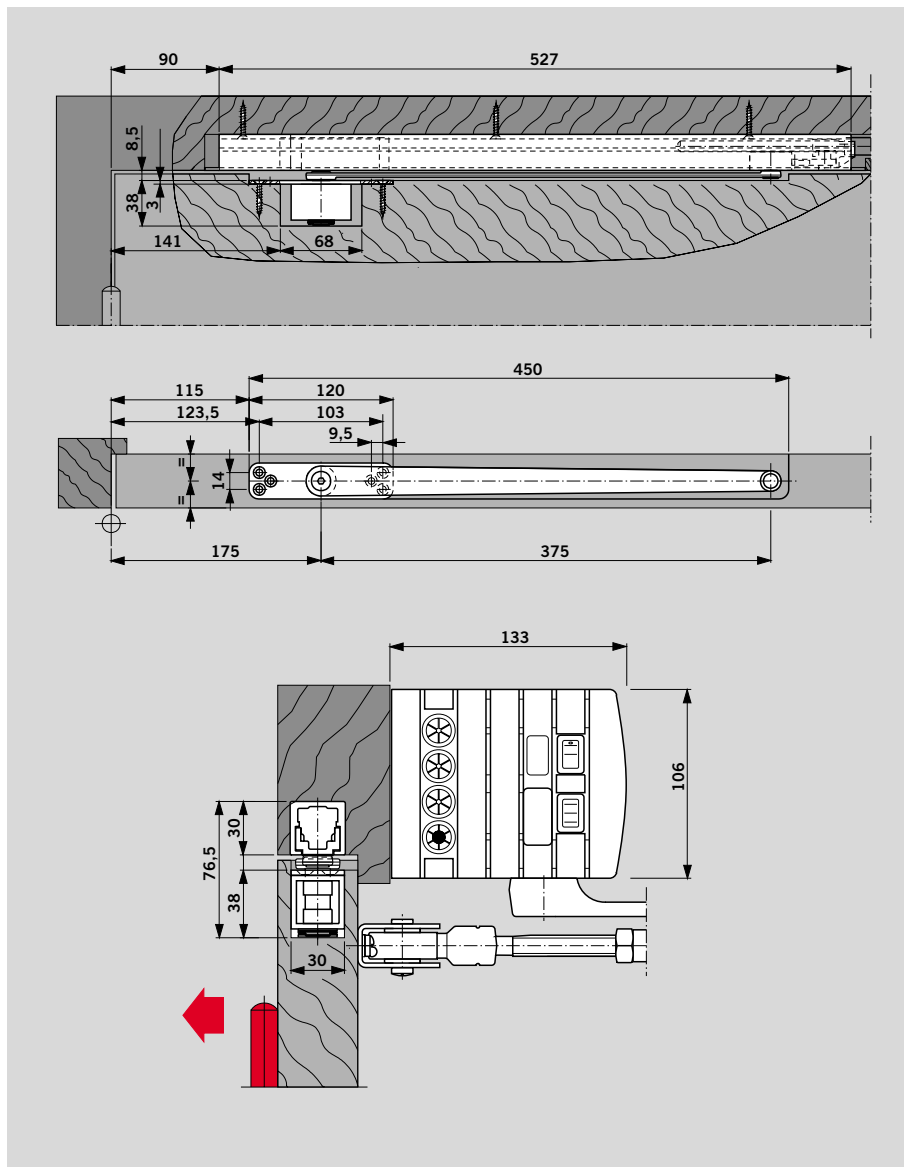

The pivot bearing used in conjunction with the G 96 N20 slide channel also acts as a **cushioned limit stay**.

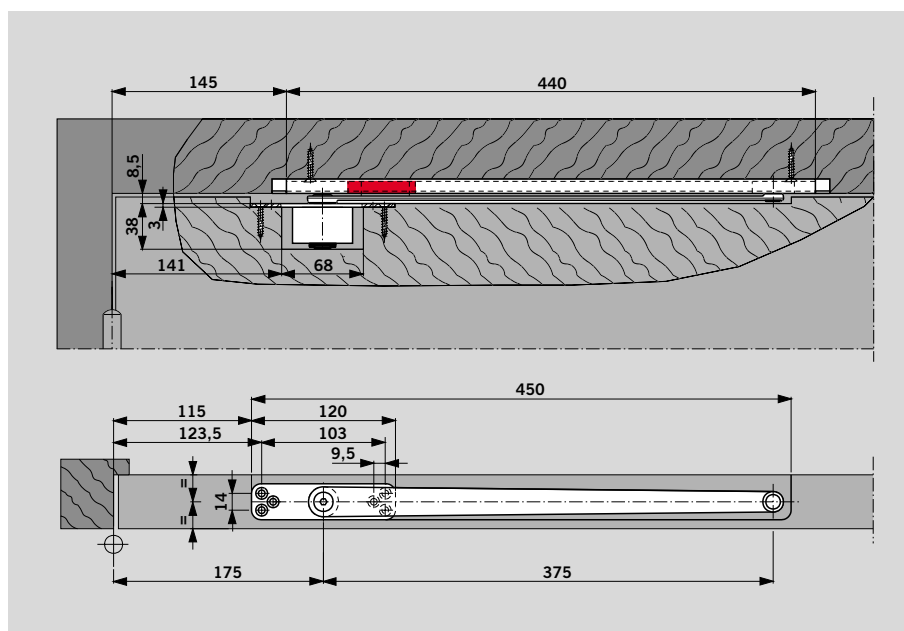

**Routing jig**

DORMA offers a routing jig as a useful accessory. It enables accurate cutting of the requisite recesses in the door leaf and/or door frame using a hand-held router.

The routing jig consists of an aluminium base frame into which fit the templates for the door closer and the slide channel including the fixing accessories.

Further accessories available: Carbide tip cutting tool, 16 mm dia., 150 mm or 170 mm long.

The routing jig is suitable both for flush closing and over-rebated timber doors.


Routing template for  
ITS 96 EN 2 – 5




Routing template for  
ITS 96 EN 1 – 3



Routing template for  
slide channel G 96 N and  
fixing accessories frame




Base frame

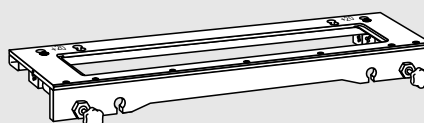

Carbide tip cutting tool  
16 mm dia., 150 or 170 mm long



The router must have a plunging stroke of at least 62 mm and be fitted with a guide bush of 24 mm dia.

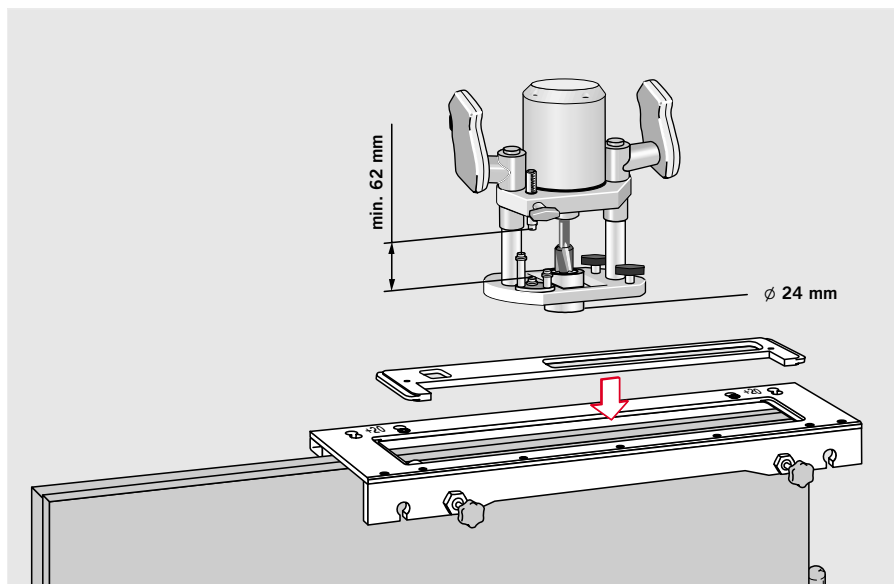

The use of hold-open devices may be subject to certain conditions. These usually deal particularly with the relevant acceptance, routine inspection and maintenance requirements.

The information given on this page is designed to inform all relevant persons of the most important measures to be implemented in order to ensure best practice governing the operation of hold-open systems.

Further details can be found in the following documents:

- Guidelines for hold-open systems, published by the German Institute for Building Technology, Berlin.
- Building Regulations, England and Wales
- Other national building regulations
- EN 1155

### 1 General

**1.1** In respect of doors etc. which are held open by hold-open systems, the area needed for closure must be kept permanently free of obstructions. This area should be clearly indicated by means of lettering, floor markings or similar. If necessary, structural measures may need to be taken in order to ensure that wiring/ducting, stored goods or structural components (e.g. false ceilings or other components) do not fall down into the area to be kept clear.

**1.2** As far as possible, smoke detectors should be used for hold-open systems. Smoke detectors should be used for hold-open systems for doors etc. in emergency exits and escape routes.

**1.3** All hold-open devices should allow manual release without their operational readiness being adversely affected. Door closers with electro-magnetic hold-open systems can be released by pressing lightly on the door leaf. If hold-open magnets or free-swing door closers are used, the release function is triggered by pressing a switch. The switch must be located in the immediate proximity of the door and must not be covered when the door is held open.

### 2 Commissioning










**2.1** After the system has been fitted ready for use on site, it should be commissioned to check that its operation is problem-free and that its installation complies with all relevant regulations. The commissioning should only be performed by qualified technical personnel.

### 3 Routine Inspection

**3.1** The operator should keep the hold-open system in a permanently fit state for use and must inspect it at least once a month to ensure its functional integrity.

**3.2** In addition, it is the responsibility of the operator to ensure that all devices are checked and maintained/serviced to ensure their combined functional integrity, this to be performed at least once a year, unless a shorter time period is stipulated in the national regulations. This inspection and servicing activity should only be carried out by a specialist or suitably qualified person.

**3.3** The scope, result and time of the routine inspections should be recorded, and these records should be retained by the operator.

		ITS 96	ITS 96 with 4 mm extended spindle	ITS 96 with 8 mm extended spindle
				
		EN 2 – 4 ■ 52400150 EN 3 – 6 ■ 52250150	EN 2 – 4 ■ 52410150 EN 3 – 6 ■ 52260150	EN 2 – 4 ■ 52420150 EN 3 – 6 ■ 52270150
For specification text/product description, see page		4	4	4
<b>G 96 N20</b> 	L □ 52003701	8	□	□
	K8/K12 R □ 52003801			
<b>G 96 N</b> 	K8 L □ 52001901	8	□	□
	R □ 52002001			
	K12 L □ 52002201			
	R □ 52002301			
<b>G 96 EMF</b> 	K8 L □ 52001501	10	□	□
	R □ 52001601			
	K12 L □ 52002401			
	R □ 52002501			
<b>G 96 GSR</b> 	□ 52001801	12	□	□
	K8 260 <sup>1)</sup> □ 52004001			
	□ 52002601			
	K12 260 <sup>1)</sup> □ 52004101			
<b>G 96 GSR-EMF</b> 	□ 52001701	14	□	□
	K8 260 <sup>1)</sup> □ 52004201			
	□ 52002701			
	K12 260 <sup>1)</sup> □ 52004301			
Fixing plates for ITS 96 		22	#	#

**Routing jig**

Routing template for ITS 96 EN 3 – 6  
52001000




Cutting tools, 16 mm dia.  
150 mm 52001200  
170 mm 52001300

Routing template for ITS 96 EN 2 – 4  
52000900



Routing template for G 96 N and baseframe  
52000700

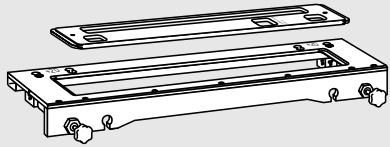

■ = Closer body separate

□ = Slide channel separate








# = Optional accessory

L =  LH/anticlockwise closing (ISO 6)

R =  RH-clockwise closing (ISO 5)

<sup>1)</sup> GSR door co-ordinator for inactive leaf of 540–700 mm (inactive leaf slide channel shortened, arm 260 mm)

Product description, see page 24

RF hold-open unit for G 96 N	RF hold-open unit for G 96 GSR, inactive leaf	Fixings for mounting the G 96 N on timber doors	Fixings for mounting the G 96 N on aluminium doors	Fixings for mounting the G 96 N20 aluminium doors	Pivot bearing	Carry bar MK 397	
							
K8/K12 52003600	K8/K12 52003500	52000105	52000205	52000405	52003400 <sup>1)</sup>	470029xx <sup>2)</sup>	
8	–	22	22	22	23	–	
				#	#		
				#	#		
#		#	#		#		
#		#	#		#		
	#				#	#	
	#				#	#	
						#	
						#	

### Smoke detector system

**RMZ-K**  
180619xx

**RMZ-S**  
180618xx



**RM**  
3570xx88



Colour	xx		
silver	01	Stainless steel	
dark brown	03	“Design” finish	04
white (RAL 9016)	11	polished brass	05
white (RAL 9010)	10		
Special colour	09		

For specification text/product description, see page 20

1) Pivot bearing with 4 mm and 8 mm extended spindle available on request

2) MK 397 Colour xx  
galvanised 00  
special colour 30



**DORMA GmbH + Co. KG**

Postfach 4009  
D-58247 Ennepetal  
Breckerfelder Straße 42-48  
D-58256 Ennepetal  
Tel. +49(0)23 33/793-0  
Fax +49(0)23 33/79 34 95  
[www.dorma.com](http://www.dorma.com)

Subject to change without notice