



Door Closer

DORMA TS 72

The ideal solution for doors up to 1100 mm wide

The DORMA TS 72 is the ideal multi-purpose door closer for all standard door designs and constructions. Without a backplate, it is particularly easy and quick to fix.

The spring strength can be individually adapted to the

door size by means of an adjusting screw.



Quality-assured manufacture to DIN ISO 9002, EN 29002, BS 5750. Certified and verified by BSI Quality Assurance Reg No Q 6423, FM 10756

Benefits

For the trade

- Just one model for all standard doors.
- Increased stocking flexibility thanks to use of the standard ClassicLine series arm.

For the installer/fabricator

- Non-handed design.
- Closing force, closing speed and latching action adjustable in just a few movements.

For the architect/specifier

- Outstanding value for money.
- Compact construction combined with timeless design.


For the user

- Compact closing action virtually unaffected by temperature fluctuations.
- Optimum closing speed adjustment with two regulating valves.
- Reliable closing with adjustable latching action.

Data and features		
String strength (adjustable by turning round the frame arm shoe)	Size	EN 2-4
Standard doors	≤ 1100 mm ¹⁾	●
External doors, outward opening		–
Fire doors		–
Non-handed		●
Arm type	Standard	●
	Slide channel	–
Closing speed adjustable at 2 separate valves	180° - 15°	●
	15° - 0°	
Latching action adjustable (by arm)		●
Backcheck		●
Delayed action		–
Hold-open		○
Weight in kg		1.2
Dimension in mm	Length	232
	Overall depth	45
	Height	68


● Yes – No ○ Option

¹⁾ With parallel-arm fixing, the closing force is approx. 20 Nm (for doors up to 950 mm)

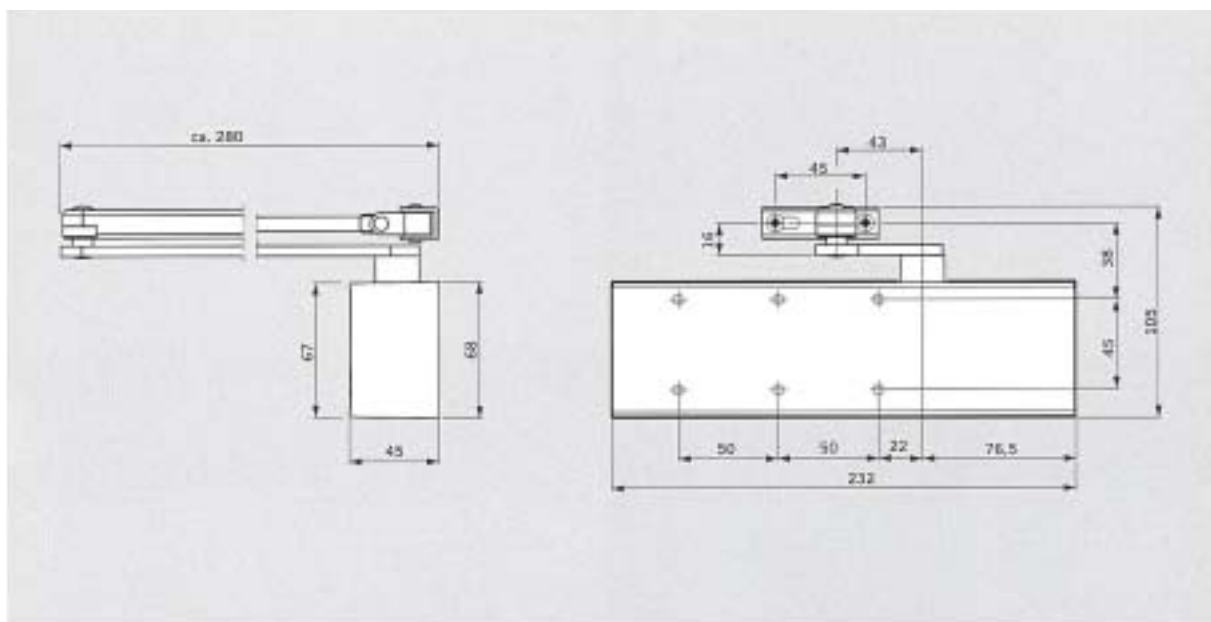


Door leaf fixing, pull side

(Example refers to left-hand [ISO 6] door; mirror image applies to right-hand [ISO 5] door)

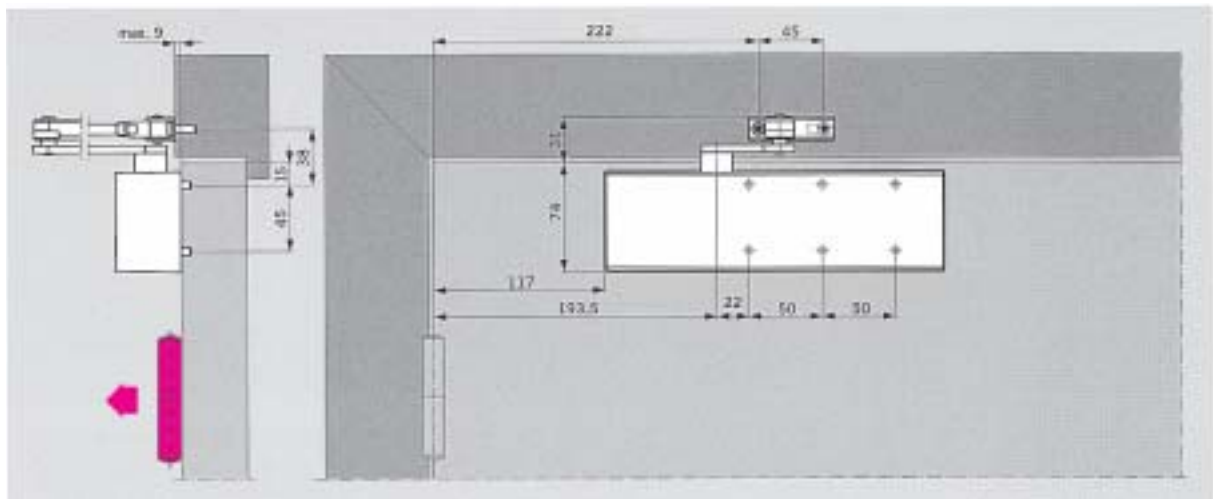


Transom fixing (overhead frame installation), push side

(Example refers to left-hand [ISO 6] door; mirror image applies to right-hand [ISO 5] door)

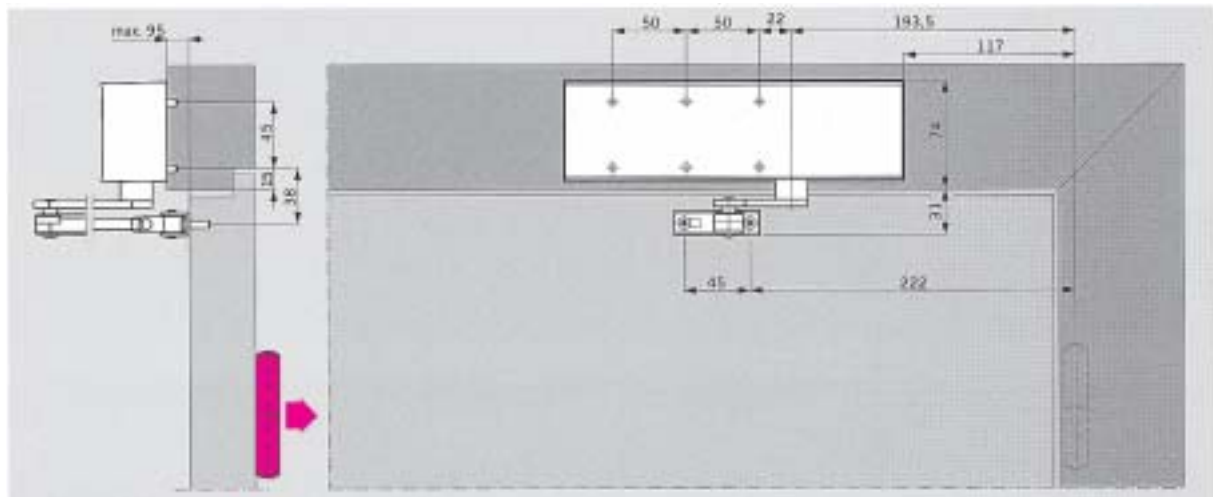

Parallel-arm fixing, push side



(Example refers to left-hand [ISO 6] door; mirror image applies to right-hand [ISO 5] door). Parallel-arm bracket necessary

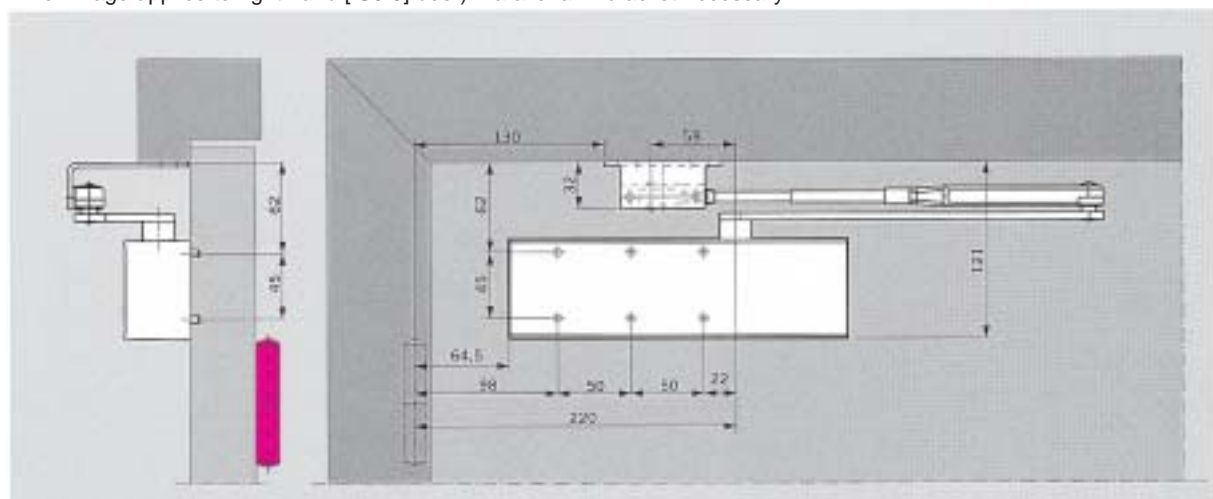

With this fixing method, the closing force is approx. 20 Nm (for doors up to 950 mm)
In this installation it is essential to pre-load the main arm by 45°



Mounting backplate

For fixing to doors on which the closer cannot be directly installed. Drilled hole pattern as per EN 1154, Supplement 1..

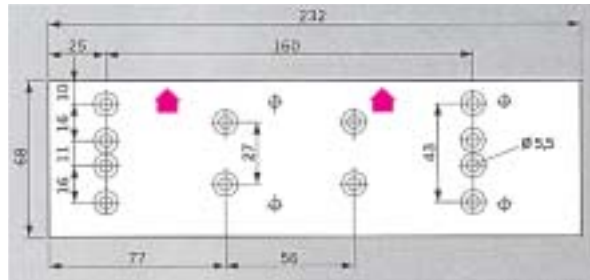

Upstand hinge bracket

For fixing the arm to particular narrow door frames.

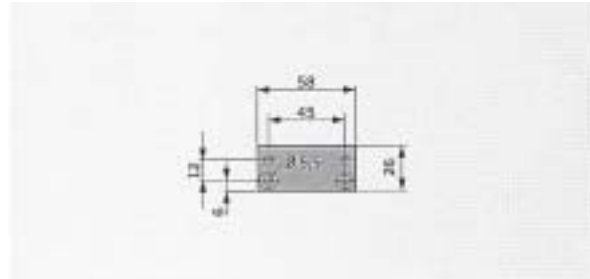

Standard and optional functions



The **closing speed** of the DORMA TS 72 is variable in two independent ranges by separate valves.

In addition, the **latching action** can be adjusted at the closer arm.

The **closing force (size) setting** for the door width concerned is variable at the adjustment screw located at the end face of the TS 72 closer body..


Closing force settings

Door Width	Settings
≤ 850	EN 2
≤ 950	EN 3
≤ 1100	EN 4

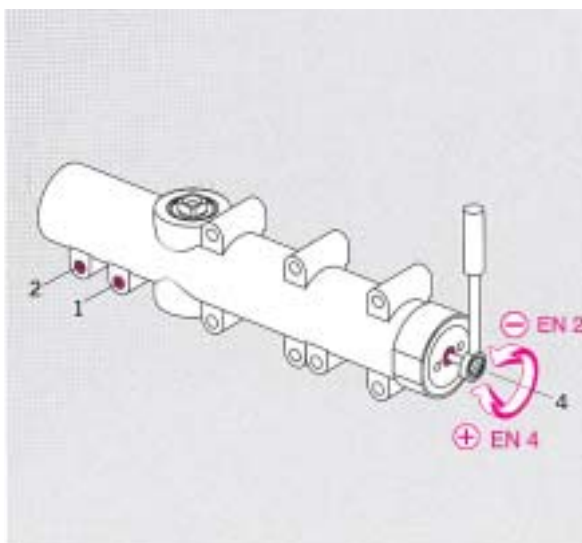





- 1 Closing speed adjustable in the range 180° - 15°.
- 2 Closing speed adjustable in the range 15° - 0°.
- 3 Latching action (variable at arm).
- 4 Adjustable closing force.

If the DORMA TS 72 is installed with a **hold-open arm**, the doors can be held open at any desired point (up to approx. 150°).



- 1 Hold-open range.

Standard equipment and accessories

<p>Closer body TS 72</p> 	<p>Standard arm</p>  <p><input type="checkbox"/> 220023xx</p>	<p>Hold-open arm</p>  <p><input type="checkbox"/> 220025xx</p>	<p>Mounting backplate</p>  <p>220021xx</p>	<p>Hinge plate</p>  <p>830014xx</p>	<p>Parallel-arm bracket (Standard)</p>  <p>280066xx</p>
--	--	---	---	--	--

Specification text

Rack- and-pinion door closer with adjustable closing force, size EN 2 - 4, closing speed adjustable in two independent ranges, with adjustable latching action. Non-handed. Including parallel-arm bracket.

Model

- with standard arm
- with hold-open arm

Accessories

- Mounting backplate
- Upstand hinge plate

Colour

- Silver
- Dark brown
- Gold
- Black

Make DORMA TS 72

DORMA DOOR CONTROLS PTY. LTD.

VIC. / TAS.

HEAD OFFICE:
52 Abbott Road,
Hallam VIC. 3803
Tel. (03) 9796 3555
Fax (03) 9796 3955

N.Z.

17B George Terrace,
Onehunga
New Zealand
Tel. 622 2660
Fax 622 2661

N.S.W. / A.C.T.:

Unit 1 / Block V / 391 Park Road,
Regents Park N.S.W. 2143
Tel. (02) 9645 6455
Fax (02) 9645 4561

S.A.:

2 Chestnut Grove,
Golden Grove S.A. 5125
Tel. (08) 8289 3499
Fax (08) 8289 4463

QUEENSLAND:

44 Harries Road,
Coorparoo QLD. 4151
Tel. (07) 3847 5038
Fax (07) 3394 2953

W.A.:

139 Blackall Drive,
Greenwood W.A. 4151
Tel. (08) 9243 7055
Fax (08) 9243 7066