



## Latching & Accessories

### Latching Detail Single & Double Door Versions

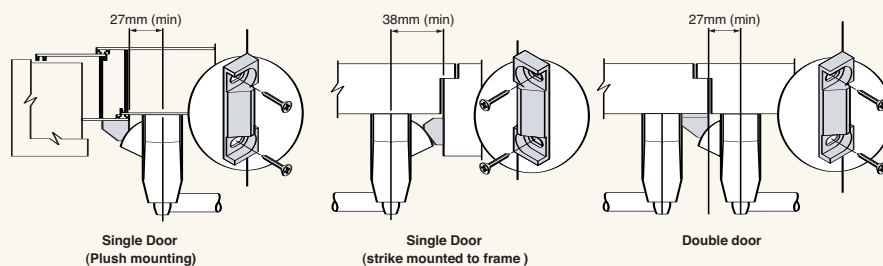

### Latching Detail for Vertical Rod Versions

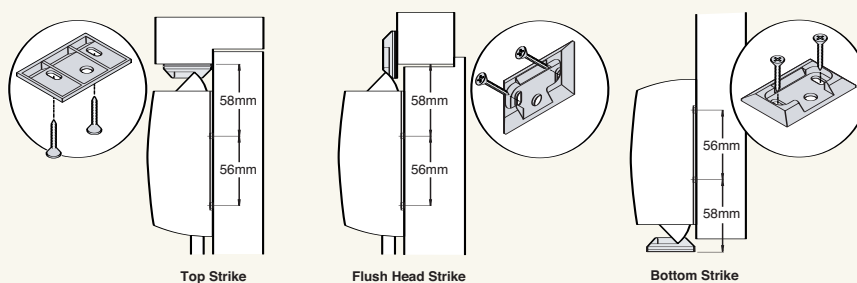

### Outside Trims (Optional)



#### Pull Handle: 5500/15SIL

- For Euro Profile half cylinder, fixed cam
- Easy to use pull action
- Case width: 44 mm
- Projection from door: 42.25 mm
- Suitable for maximum door thickness of 90 mm



#### Lever Handle: 5500/10SIL

- For Euro Profile half cylinder, fixed cam
- Reversible lever handle makes handing changes easy
- Case width: 36 mm
- Projection from door: 42.75 mm
- Suitable for maximum door thickness of 90 mm



LOCK UP WITH LOCKWOOD®

Visit us at: [www.assaabloypacific.com](http://www.assaabloypacific.com)

## ASSA ABLOY Sales Offices & Authorised Agents in Asia Pacific

### Victoria – Head Office

50 Edward Street  
Oakleigh VIC 3166  
Telephone (03) 8574 3888  
Facsimile (03) 8574 3788

### Queensland South

450 Sherwood Road  
Sherwood QLD 4075  
Telephone (07) 3373 5200  
Facsimile (07) 3373 5256

### Queensland North

Ralph Buck Agencies  
15 Mackley Street  
Garbutt QLD 4814  
Telephone (07) 4779 0177  
Facsimile (07) 4775 1480

### New South Wales – Commercial

Unit 1/16 Atkinson Road  
Taren Point NSW 2229  
Telephone (02) 8543 3700  
Facsimile (02) 9531 7944

### New South Wales – Residential

Unit 5/30 Foundry Road  
Seven Hills NSW 2147  
Telephone (02) 9620 9111  
Facsimile (02) 9620 9055

### Abloy Security

5/372 Eastern Valley Way  
Chatswood NSW 2067  
Telephone (02) 9882 6066

### South Australia

182 Magill Road  
Norwood SA 5067  
Telephone (08) 8364 1930  
Facsimile (08) 8364 1931

### Western Australia

45 Gladstone Street  
East Perth WA 6004  
Telephone (08) 9227 9588  
Facsimile (08) 9227 8913

### Tasmania

23 Antill Street  
South Hobart TAS 7000  
Telephone (03) 6223 5404  
Facsimile (03) 6224 0435

### Christchurch

Unit 5, 8 Venture Place  
Christchurch New Zealand  
Telephone (03) 379 4810  
Facsimile (03) 379 4819

### Manufacturing Plants

#### Victoria

50 Edward Street  
Oakleigh VIC 3166  
Telephone (03) 8574 3888  
Facsimile (03) 8574 3788



#### Queensland

450 Sherwood Road  
Sherwood QLD 4075  
Telephone (07) 3373 5200  
Facsimile (07) 3373 5256



#### New Zealand

5 Armstrong Road  
North Harbour Industrial Estate  
Albany, Auckland New Zealand  
Telephone +64 (0)9 6224 804  
Facsimile +64 (0)9 6224 802

#### Auckland

9B Mahunga Drive  
Mangere Bridge  
Auckland New Zealand  
Telephone +64 (0)9 6345 590  
Facsimile +64 (0)9 6345 589

#### Wellington

47 Kenepuru Drive  
Porirua  
Wellington New Zealand  
Telephone +64 (0)4 2370 808  
Facsimile +64 (0)4 2370 060

### Export Department

50 Edward Street  
Oakleigh VIC 3166 Australia  
Telephone +61 (0)3 8574 3888  
Facsimile +61 (0)3 8574 3789

### Asian Offices

**ASSA ABLOY – Malaysia**

**ASSA ABLOY – Singapore**

**ASSA ABLOY – Thailand**

**ASSA ABLOY – Hong Kong**

**ASSA ABLOY – Shanghai**

**ASSA ABLOY – Beijing**

**ASSA ABLOY – Korea**

Contact the Export Department,  
Australia for details.

### Worldwide Distributors

Contact the Export Department,  
Australia for details.

## ASSA ABLOY

### Lockwood Guarantee

ASSA ABLOY Australia Pty Limited ("ASSA ABLOY") guarantees its Lockwood products against defects in workmanship and materials. If within the normal working life of a product it is found to be defective, ASSA ABLOY will supply the same or equivalent product free of charge. All electrical and electronic components used in ASSA ABLOY's range of products excluding batteries are guaranteed for a period of 12 months from the date of proof of purchase, unless stated otherwise.

ASSA ABLOY assumes no liability under the guarantee for the following:

1. Improper installation or failure to follow fitting instructions.
2. Failure due to improper maintenance.
3. Failure due to fair wear and tear.
4. Indirect or consequential loss or damage.
5. Cost of removal and/or replacement.

6. Cost of freight and/or travelling time.

7. The plated finishes Florentine Bronze, Architectural Bronze, Polished Brass, Gold and Satin Brass, "which" are classified as soft finishes. As deterioration is possible under some environmental conditions, these finishes are excluded from this guarantee.

8. Any modification or repairs to a product, as supplied, unless authorised by ASSA ABLOY Australia Pty Limited.

9. Use of replacement parts other than authorised parts.

10. Malfunction or failure of the product due to the use of non-genuine Lockwood parts.

11. Malfunction or failure of the product due to the use of non-specified batteries.

Nothing in the ASSA ABLOY Australia Pty Limited guarantee excludes, restricts or modifies any condition, warranty, right or liability implied or protected by law where to do so would render the Guarantee, or any part of it, void.






LOCK UP WITH LOCKWOOD®



# 5000 Series

## Panic Exit Device Safety Made Simple

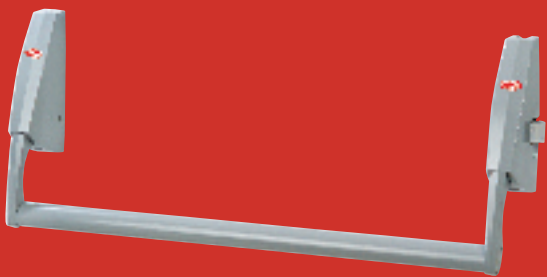

Horizontal Device



Vertical Device

- Certified to European Standard EN1125
- Extremely easy handing conversion
- Available with 1, 2 or 3 point locking
- Optional dogging (holdback) version
- Easy installation: adjustable on-site
- Outstanding value for money

## Specifications

### Safety and Security

Public buildings like most industrial and commercial premises are required to meet the conflicting need for both safety and security.

Regulations relating to escape from buildings and general demand for increased safety has made it desirable that doors at exits in public buildings, places of public entertainment, shops etc. be fitted with panic exit devices. The main purpose of a panic exit device is to give safe and effective escape through a doorway with minimum effort and without prior knowledge of the device.

The Lockwood 5000 series Panic Exit Device will enable a door to be opened at all times by hand or body pressure along the inside bar of the panic exit device and not require the use of a key or any other object. All Lockwood 5000 series Panic Exit Devices are designed for ease of opening by the young, elderly and disabled.

**Note:** The Lockwood 5000 series Panic Exit Device is suitable for commercial applications facing moderate traffic flows. Typical applications include classrooms, storerooms and entrance doors.

### Standard

The Lockwood 5000 series Panic Exit Devices meet or surpass the following standards:



EN1125:1997 for secured doors on escape routes, where panic situations are foreseen.

### Performance

#### Meets European Standard EN1125:1997

##### Normal Situations

Low opening pressure is ideal for children, older people and the disabled.  
Under these conditions a light push of 8 kg (maximum) will operate the push bar.

##### Panic Situations

Device operates in panic situations even if door is subject to loads of 100 kg.  
Under these conditions a maximum of 22 kg will operate the push bar.

#### ANTI-CORROSION

This product has been successfully tested for 96 hours in a salt spray test in accordance with European Standard EN1125:1997.

#### D3 DURABILITY

This product has been successfully tested in accordance with Level D3 (Durability) Australian Lock Standard (AS 4145.2: 1993)

#### S2 HIGH SECURITY

This product has been successfully tested in accordance with Level S2 (Physical Security) Australian Lock Standard (AS 4145.2: 1993)

### Applications

Suitable for single or double doors, timber, metal, narrow profile and glass security doors.

### Features & Specifications

Adjustable on site.  
Surface mounted for ease of installation.

#### Handing

Extremely easy handing conversion due to innovative new design.

#### Materials

Body: Zinc Alloy  
Internal mechanisms: Steel  
Horizontal operating bar: Steel

#### Door Thickness

Up to 90 mm

#### Door width

Up to 1200 mm

#### Door Height

Up to 2329 mm (standard)  
Up to 3300 mm (with optional vertical extension): **5500/50SIL**

#### Optional Outside Trims Available

Key entry with pull handle: **5500/15SIL**.  
Key entry with lever handle: **5500/10SIL**.

#### Standard Finish

Silver  
Other finishes available by special order.

#### Keying

All Lockwood 5000 series Panic Exit Devices can be used in conjunction with Lockwood Master Keying Systems, standard C4 Keyed Alike or Keyed to Differ.

Because of the complexity of keying requirements cylinders will need to be ordered separately.


#### Special Keying

Can be keyed alike, master keyed and grand master keyed, in Lockwood Twin™ high security, and Generation Six™ keying systems.




## Installation Configurations

### Single Leaf Doors



### Double Rebated Doors



### Double Doors with plain meeting stiles



## 5000 series Horizontal Panic Exit Device

The Lockwood 5000 series Horizontal Panic Exit Device is designed to provide a ready means of escape at all times by the single downward action of pushing on a horizontal bar fitted across the full width of a door.

### Features and Specifications

Suitable for single and double door applications.

Maximum door width: 1200 mm.

Easily adjustable to suit a door narrower than 1200 mm by cutting the horizontal push bar.

Easy handing conversion.

Surface mounted.



Optional hold-back (dogging).

Optional Outside Trims.

The basic 5000 series Horizontal Panic Exit Device is suitable for timber, metal and security glass doors with mid rail.

### Standard Finish

Silver. (Other finishes available by special order).




## Different Models Available

### Horizontal push bar

Single Point Locking: **5510EOSIL**

Single Point Locking with Dogging: **5510LDEOSIL**




### Horizontal push bar with pull handle & key entry

Single Point Locking: **5510PHSIL**

Single Point Locking with Dogging: **5510LDPHSIL**

Cylinder: Order Separately **9555:502CP**

- Key locks and unlocks the pull handle.




### Horizontal push bar with lever handle & key entry

Single Point Locking: **5510LHSIL**

Single Point Locking with Dogging: **5510LDLHSIL**


Cylinder: Order Separately **9555:502CP**

- Key locks and unlocks the lever handle.




### Optional dogging device

Simply push lever downwards to activate dogging device.



Release



Engage

## 5000 Series Vertical Panic Exit Device

The Lockwood 5000 series Vertical Panic Exit Device is designed to provide a ready means of escape at all times by the single downward action of pushing on a horizontal bar fitted across the full width of a door.


### Features and Specifications

- **Maximum standard height: 2329 mm**
- **Optional vertical extension device available (Up to 3300 mm): 5500/50SIL**
- Suitable for single and double door applications
- 2 or 3 point locking
- Maximum door width: 1200 mm
- Easily adjustable to suit a door narrower than 1200 mm by cutting the horizontal push bar
- Easy handing conversion
- Easy conversion from a 2 point locking device to a 3 point locking device and vice versa
- Surface mounted
- Optional hold-back (dogging)
- Optional Outside Trims

The basic 5000 series Vertical Panic Exit Device is suitable for timber, metal and security glass doors with mid-rail.

### Standard Finish:


Silver. (Other finishes available by special order).

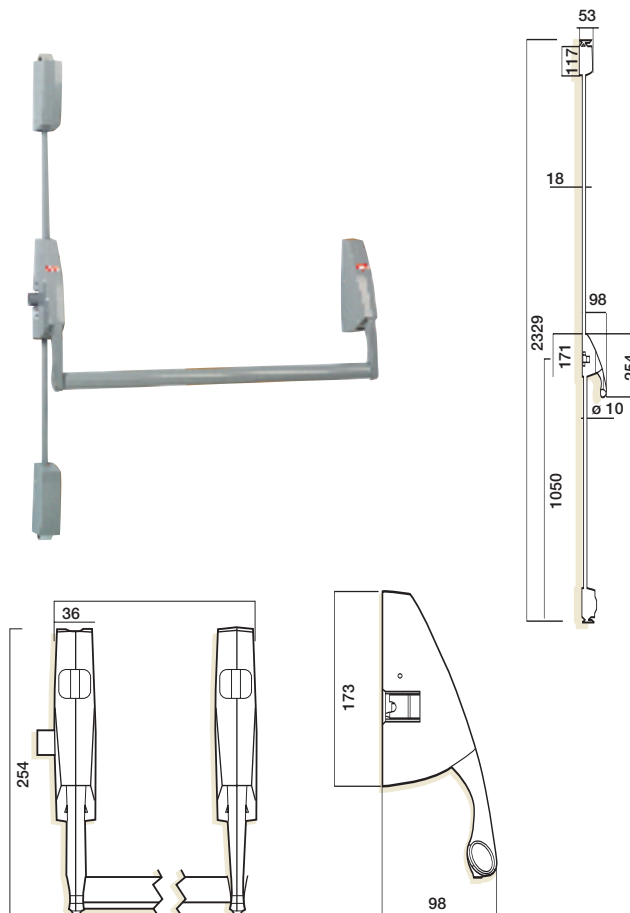

## Different Models Available


### Vertical device with horizontal push bar

- 2 point / 3 point locking: **5530EOSIL**
- 2 point / 3 point locking with dogging: **5530LDEOSIL**




### Vertical device with horizontal push bar with pull handle & key entry

- 2 point / 3 point locking: **5530PHSIL**
- 2 point / 3 point locking with dogging: **5530LDPHSIL**
- Cylinder: Order Separately **9555:502CP**
- Key locks and unlocks the pull handle.



### Vertical device with horizontal push bar with lever handle & key entry

- 2 point / 3 point locking: **5530LHSIL**
- 2 point / 3 point locking with dogging: **5530LDLHSIL**
- Cylinder: Order Separately **9555-502CP**
- Key locks and unlocks the lever handle.



### Optional dogging device

Simply push lever downwards to activate dogging device.

