

BI-FOLD

Capacity:

- Maximum door weight: 14kg (single leaf weight).
- Maximum door width: 610mm.
- Maximum door height: 2400mm.
- Door thickness: 20mm - 41mm.

Application:

Easy-fit gear for wood or composite folding doors, with silent nylon spring loaded guides in an aluminium top track.

The spring loaded end pivot arrangement allows leaves to fold completely flat for unhindered access to walk-in cupboards and wardrobes. No bottom track or door jamb is required. Any number of two leaf units can be used for an opening, each anchored by top and bottom pivots.

Packset Components:

Standard packset kits for 2 or 4 (2 by 2) leaves contains:


- Top track - aluminium (310). Available in 934mm, 1234mm, 1241mm, 1661mm and 1861mm lengths.
- Top Pivot Bracket (311).
- Bottom Jamb Bracket (312).
- Top Pivot (313).
- Bottom Pivot (314).
- Guides - nylon (315).
- Bumper (316).
- Hinges (282).
- Aligner (319) - Four door sets only.
- Screws.
- Spanner.
- Fixing instructions.

Packset Sizes:

- B32 - Max. opening width 934mm for 2 doors.
- B42 - Max. opening width 1234mm for 2 doors.
- B44 - Max. opening width 1241mm for 4 doors.
- B54 - Max. opening width 1661mm for 4 doors.
- B64 - Max. opening width 1861mm for 4 doors.
- B84 - Max. opening width 2461mm for 4 doors.
- 320 - Bi-fold 2 door fittings pack only.
- 340 - Bi-fold 4 door fittings pack only.

Please note:

- Top and bottom pivots and guide must be securely fixed into door rails - minimum thickness 20mm.
- Adjustable bottom pivot for ease of fitting.
- Please refer to component section for component options and technical detail.

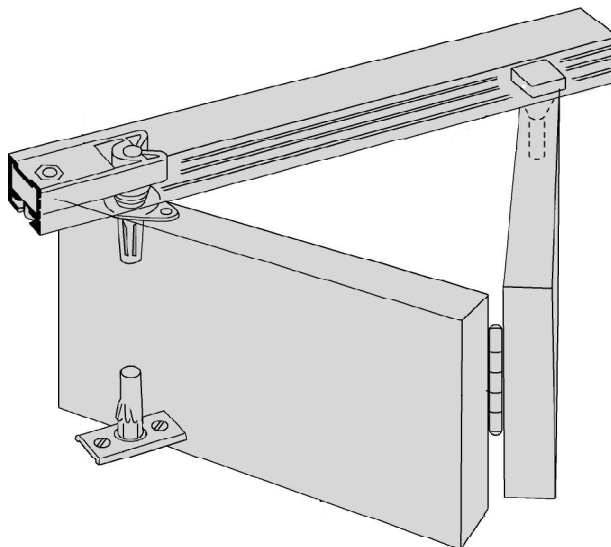

BI-FOLD

BI-FOLD

