


CURTAIN HANGING

Capacity:

- Weight per hanger (industrial curtains): 20kg.
- Weight per hanger (cable carriers): 40kg.

Application:

- Light overhead track to carry industrial curtains or tarpaulin.
- Light overhead track system for supporting electrical or other cables required for travelling cranes, gantries or moving machinery. Equally adaptable for production lines to carry small hand machinery, leaving a clear working area.

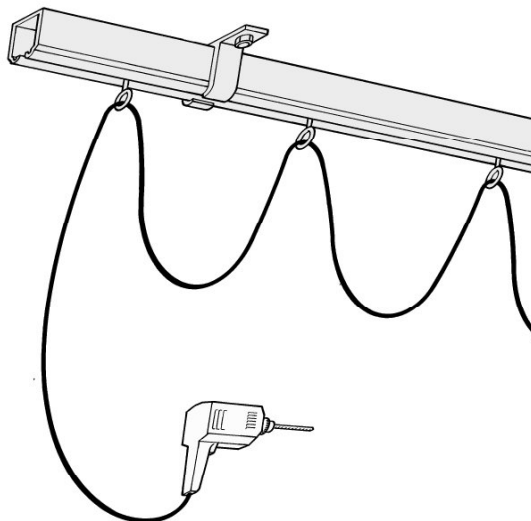

Components:



- Track - 290. Available in 2m, 2.5m and 3m lengths.
- Track curves - (600K).
- Bracket - 1A/290. Spaced at centres not exceeding 900mm reducing to 600mm where curtain stacks.
- Hanger - nylon wheels, bronze bearings (58KN).
- Hanger - 4 wheel, for the cable carrying only (56KN).

Please note:


- Hangers are usually spaced at 450mm centres and are provided with hooks for fixing to eyelets in the curtain.
- Provision is made for an operating cable to pass through the hanger below the track.
- Buffers on the hangers prevent overriding when bunched.
- Please refer to the components section for component options and technical detail.

CURTAIN HANGING



CURTAIN HANGING

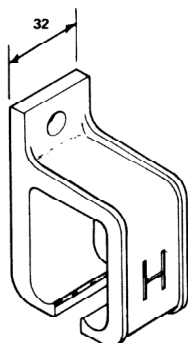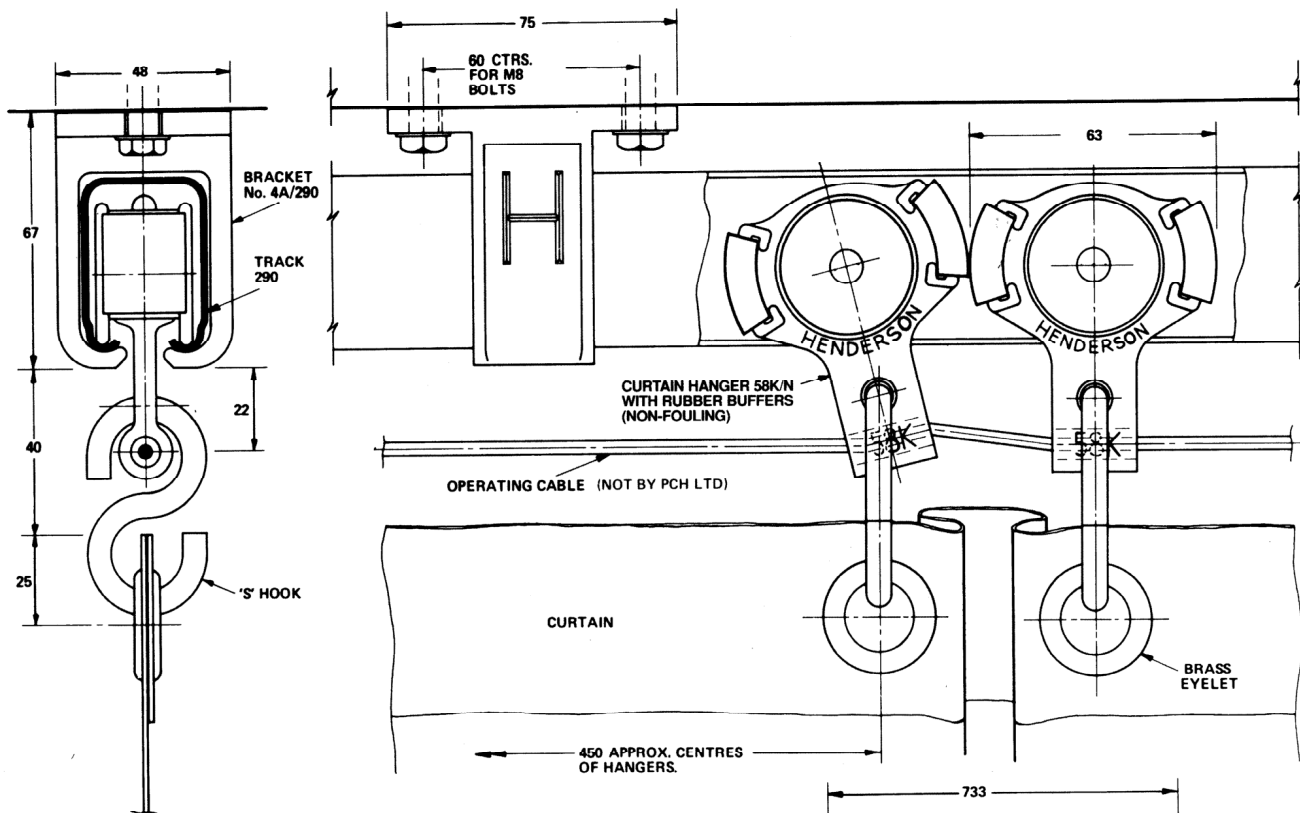

BRACKET No. 1A / 290

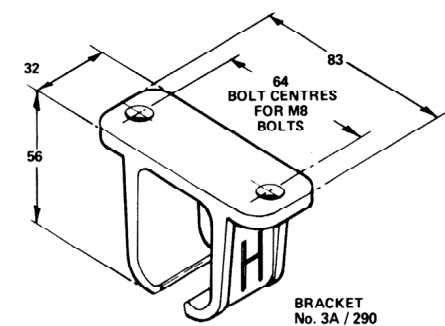

ALTERNATIVE BRACKETS

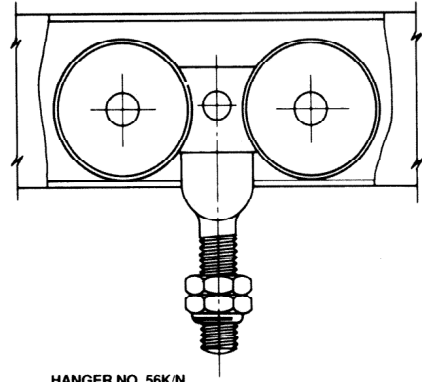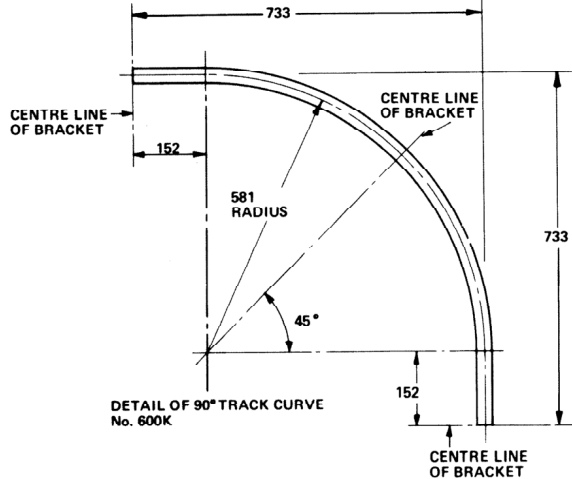

HANGER NO. 56K/N