

MAJESTIC STRAIGHT SLIDING DOORS

Capacity:

- Maximum door weight: 270kg.
- Maximum door height: 3300mm.
- Door thickness: 45mm - 57mm.

Application:

Designed for heavy straight sliding partitions and especially fully glazed patio or showroom doors where good class joinery requires the highest quality fittings. Door weight is carried on the floor permitting the use of a relatively light overhead structure with glazing or panels above. Any number of doors may be used on single or multiple lines of rail.

Components:


- Top guide channel - (900A). Available in 2m, 3m, 4m or 6m lengths.
- Brackets - single run, face fixing (1SS/250).
- Brackets - single run, soffit fixing (3/900).
- Brackets - double run, face fixing (5/900).
- Guides - Stainless (203/900SS).
- Bottom rollers - brass wheel (916).
- Bottom rail - brass recessed (917). Available in 2m, 2.5m or 3m lengths.

Optional Extras:

- Flush Bolts.
- Handles.
- Locks - a wide variety of locking options are available within the Interlock range of products.
- Stops.











Please note:

- Door construction - Deep bottom rails are necessary (min. 175mm), to accommodate the concealed and mortised bottom rollers. Doors may be panelled, flush or glazed.
- Brackets fix every 900mm maximum and at channel joints.
- Guides, two per door required.
- Please refer to the component section for component options and technical detail.

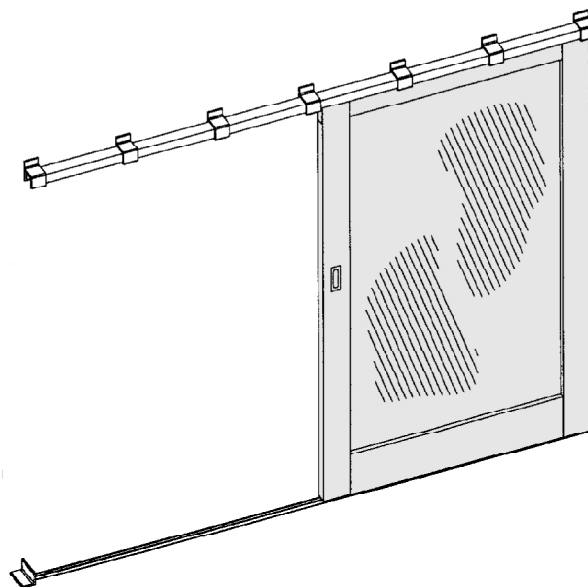

MAJESTIC STRAIGHT SLIDING DOORS

MAJESTIC STRAIGHT
SLIDING DOORS

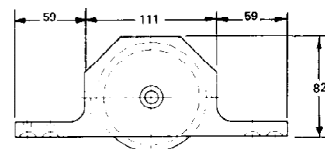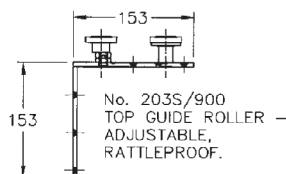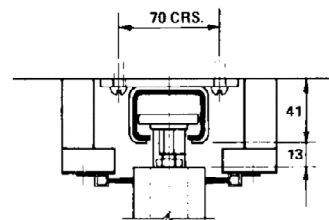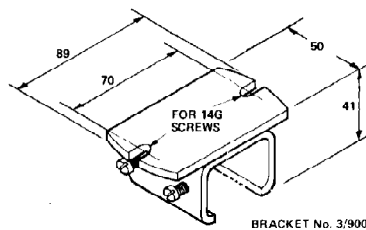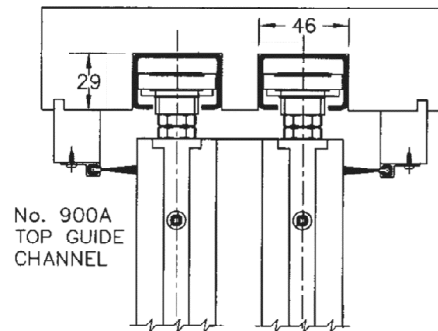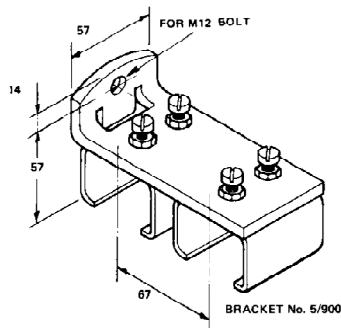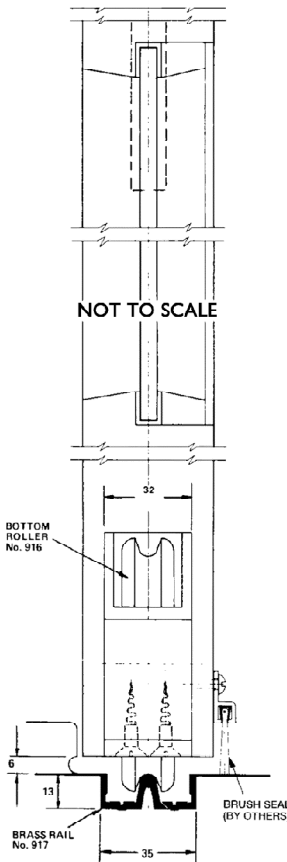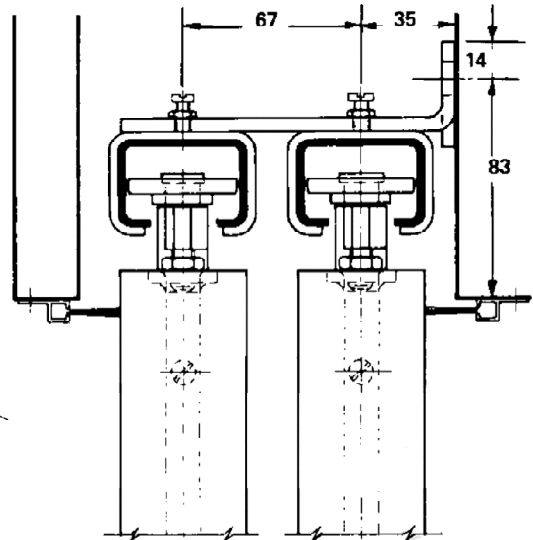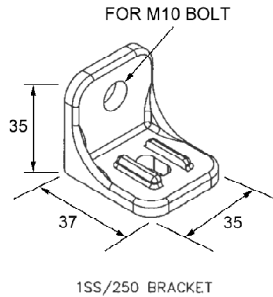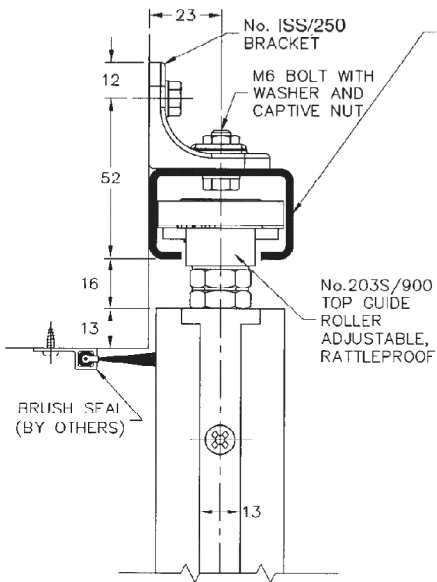

BOTTOM ROLLER No. 916
BRASS ROLLER - BALL JOURNAL BEARING

