



RP92 Si is a heavy duty automatic door bottom seal, which is spring loaded to lift clear of the floor as soon as the door leaf is opened by a few millimetres. RP92 Si is designed for broad butt hinged doors with large gaps and can accommodate ramped floors/sills with gradients up to 1:5. Particularly suitable for wheelchair access ramps where large clearances are necessary under inward opening doors. Larger gaps can be accommodated if set lower on the door bottom and smaller gaps if set higher on the door bottom (user determined).

**Location**

Timber or aluminium single and double broad butt hinged doors.

**Min/Max Action Sealing**

gap is 25mm to 55mm.

**Seal Sizes**

1200mm, 1070mm, 920mm, 820 to 600mm (min). Seals cut back to exact size.

**Standard Finish**

Aluminium anodised 15 microns. Satin Clear (Silver) finish. Black anodised inner.

**Fixing Method**

Zinc plated, cross recess head S.T. screws of the appropriate size and colour are supplied. Escutcheon plates and self adhesive striker plate (25mm x25mm) included.

**Seal Material Silicon (SE)** (Charcoal).

**Replacement Seal RP347Si.**

**Adjustment** Has set screw for sealing action adjustment.




**Approvals**

**Access & Mobility**


AUS/NZ: Conforms to BCA D3, D3.2.

UK/EU: Conforms to Approved Document M.

**Durability** tested to over 1,000,000 operating cycles without failure.

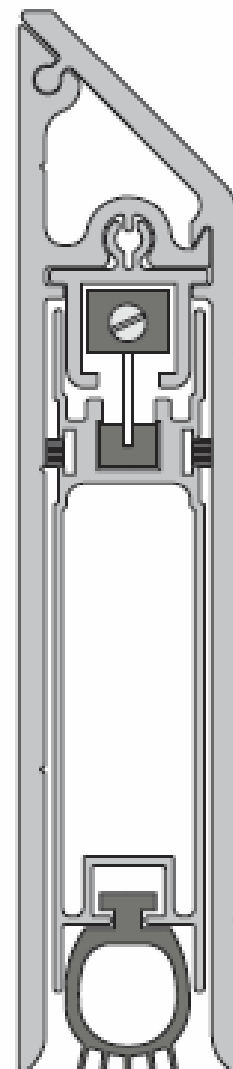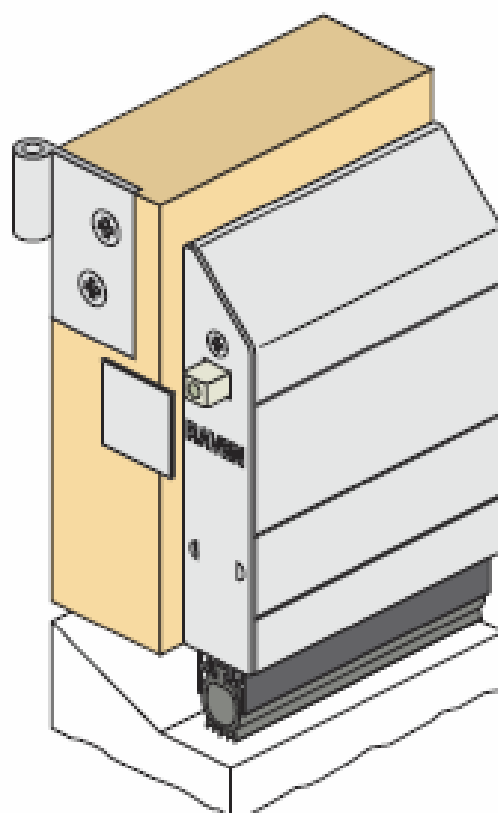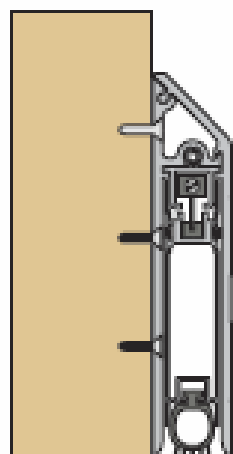

119

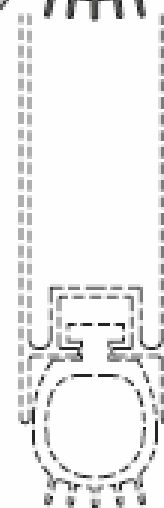

55